

## OUR SOLUTIONS

Our customers include original equipment manufacturers and aftermarket distributors, for whom we deliver a wide range of products. Our offerings include thermoset and thermoplastic polyurethane belts, rubber timing and V-belts, flat belts, multi-rib belts, engineered/specialty belts, pulleys, clamping plates, timing bars and complementary products that can be customized for your application.

Engineered belts are the pride of Megadyne. Customers who purchase our fabricated solutions first experience the expertise of our professionals and are then amazed by the final product. Each fully customized power transmission belt, complete with all accessories, is precisely tailored to meet the exact requirements of the customer's application.




## Welcome to Megadyne **Power Transmission Solutions**

Megadyne supplies complete and innovative solutions for broad applications and industries such as **material handling, elevators, machine tools, food industry equipment, packaging, fitness, wood, marble, and ceramics...** just to name a few of the many industrial markets where you'll find the Megadyne name.



WE MAKE  
YOUR  
BUSINESS  
MOVE

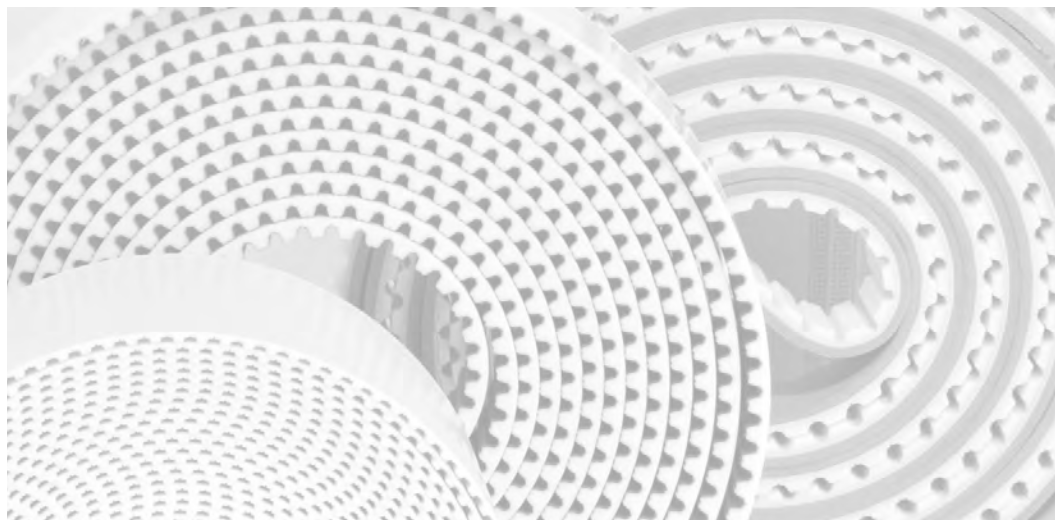



# INDUSTRY APPLICATIONS AT GLANCE

FOOD INDUSTRY  
PACKAGING INDUSTRY  
OTHER INDUSTRIES

# FOOD INDUSTRY

## FOOD-APPROVED MATERIALS IN HIGH-SPEED AND PRECISION HANDLING APPLICATIONS

Megadyne offers a range of belts offering high-speed and precision handling performance, made by FDA materials and EU approved certifications, designed to offer a high-end solution for any food handling applications.


### MAIN APPLICATIONS

- Meat Slicing
- Inspection Line
- Vertical Form Fill and Seal
- Horizontal Form Fill and Seal
- General Conveying
- Sausage Belts




Additionally, Megadyne offers a wide variety of cover materials, which are food approved. We have diverse Thermoplastic PU, PVC, Rubber, and Silicone covers applicable for any kind of food application. Combining the belts with an additional cover does not meet the same standards as the base belt. Contact Megadyne for more information.

## RECOMMENDED PRODUCTS

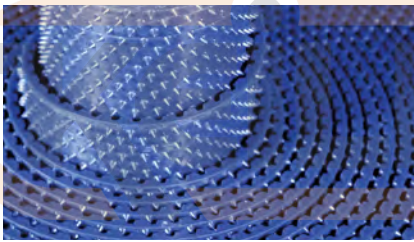


### MEGALINEAR FC

New to the MEGALINEAR family, and introduced for food processing and packaging applications, MEGALINEAR FC is manufactured with food-contact approved materials, according to European regulations EU 1935/2004, EU 10/2011, and EU174/2015. MEGALINEAR FC is manufactured in T5/T10 pitch without gap between the teeth and is available in a smooth surface or backing profiles, such as Spike Top, Noppen, and others, for all kinds of conveying and processing applications. These advanced food-contact synchronous belts have excellent resistance to chemicals and corrosion and are designed for use in wet and dry food-contact applications. The homogeneous belt design ensures a significantly greater service-life with a high-level of hygienic integrity.

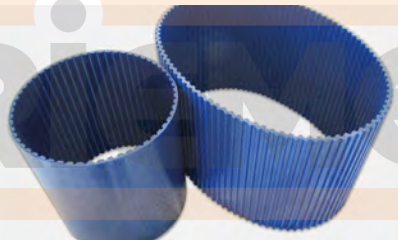

### MEGAPOWER FC

Designed for power transmission and certain synchronous conveying applications within the food and packaging industry where the polyurethane chemistry is beneficial for oily environments and where rigorous wash down procedures are common. Featuring stainless steel cords and food-compliant blue polyurethane according to European regulations EU 1935/2004, EU 10/2011, and EU174/2015, MEGAPOWER FC is ideal for both wet and dry applications thanks to its good chemical and corrosion resistance in humid and wet environments. MEGAPOWER FC handles your high acceleration, multi stop/start synchronous food product handling drives with ease.

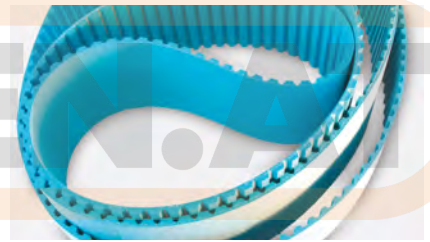

### FCM BELTS

MEGALINEAR FCM and MEGAFLEX FCM are available in Light Blue Thermoplastic PU and stainless-steel cord. This combination conforms to an FC approval for the belt according to EC 1935/2004. Kevlar® cords. They are available for MEGALINEAR FCM with T10 and AT10 without gap.

Thanks to the belt construction and cord pitch, FCM belts are also suitable for heavy load conveyor and power transmission applications, for example linear units for Food processing.



Visit [www.megadynegroup.com](http://www.megadynegroup.com) for more information on our product offering in the Food Industry.

ENGINEERED &  
SPECIALTY BELTS

# PACKAGING INDUSTRY

## CUSTOMERS RELY ON MEGADYNE'S FULL LINE OF BELTING SOLUTIONS FOR THE PACKAGING INDUSTRY, INCLUDING A WIDE RANGE OF STANDARD AND CUSTOMISED PRODUCTS

Megadyne provides its customers with innovative solutions to specific Packaging Industry needs, offering a wide selection of belt constructions and manufacturing processes thanks to years of industrial experience. Megadyne products are used in packaging equipment from the start to the finish of the packaging line.

Our portfolio of synchronous and non-synchronous belts, including special cover materials, cleated belts, machined modifications, and other fabrications types, deliver the solutions for a wide variety of applications including:

- Carton forming/box erecting/box closing
- Filling
- Blow molding machines
- Capping lines
- Cartoning lines
- Check weighing
- Feed lines
- Filling lines
- Form, fill, and seal
- Wrapping and sealing
- Labeling



### VERTICAL FORM FILL SEAL BELTS

- Homogeneous moulded covers that provide uniform wear surfaces free of hard spots to increase performance
- Covers without any splices or seams for increased reliability
- Continuous, durable wearing covers that provide consistent friction for life of the belt
- Non-glazing compounds that offer excellent grip and slip prevention
- Excellent abrasion resistance for an increased trouble-free lifespan
- Excellent flexibility without cracking or tearing
- Standard OEM replacement belts for all major manufacturers
- CNC machined precision modifications such as slots, countersunk holes, grooves, and profiles within precise tolerances for outlasting performance
- Metal Sealing Bands available



### IN-LINE FILLING BELTS

After filling of liquids, capsules, and pills; capping machines apply, tighten and secure caps of varying material types to bottles. and containers made of glass, PET, PVC, PP, LDPE, and HPDE.

Capping machines are used to complete the packaging of food products, beverages, household products, pharmaceuticals, and industrial goods. Megadyne's Specialty Belt Division can manufacture the correct frictional and cushioning types of belts to apply torque and twisting motion to securely lock the cap in place.



### FOOD PACKAGING

On the Food Packaging, MEGALINEAR timing belts - joined with PPJ joint system and equipped with FDA cleats - exceed the performance of non-synchronous flat belts and guarantee the most efficient product separation without belt slippage, lack of synchronization, expensive downtime, high-cost of spare parts.


ENGINEERED &  
SPECIALTY BELTS



Visit [www.megadynegroup.com](http://www.megadynegroup.com) for more information on our product offering in the Packaging Industry.




# OTHER INDUSTRIES

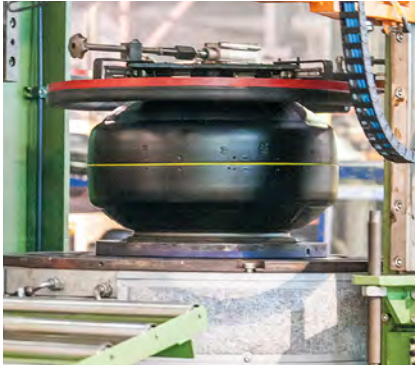

## **AUTOMOTIVE & TYRE**

Working hand in hand with our partners in the Automotive and Tyre industry led us to create belts for vacuum, magnetic applications, the transport of raw-rubber, and metal stock. Our customised belts serve different applications, ensuring excellent cut and wear-resistance, high-strength for lifting, good oil and chemical resistance, low friction for accumulation, and non-marking high grip where needed.

- Sheet Metal Processing
- Glass tempering line and storage
- Car chassis assembly
- Skid conveyors applications
- Tyre manufacturing

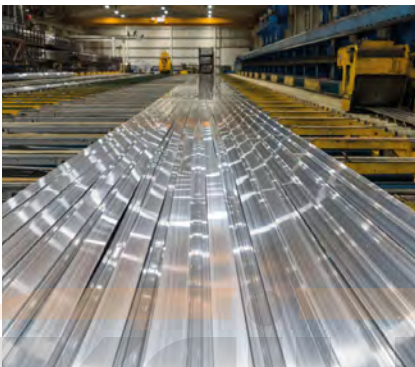

## **ALUMINUM EXTRUSION**

Our belting products are used in a wide range of applications to ensure materials are transported successfully throughout each stage of aluminium production. Megadyne offers tailored solutions to meet your handling requirements such as non-marking surfaces and high-temperature product handling.



## **CERAMIC, GLASS, BRICK & STONE**

Megadyne offers urethane and rubber materials that can be fitted to your application. We offer high-friction and excellent wear-resistance as well as cover modifications to assist in product handling, such as holes and angular or lateral machining.

- Grinding Machines
- Cutting Lines
- Beveling Lines
- Drilling Lines
- Polishing Lines
- Tempering Lines
- Sealing Lines



## **MATERIAL HANDLING**

High-strength and precision repeatability are essential components required in lift movement and material handling. With a broad range of urethanes and cord options, Megadyne can supply the right belt for your application.

- Live Roller Conveyors
- Cross Sorters
- Pallet and Transport Platform Conveyors
- Gapping Conveyors
- Incline Conveyors
- Line Conveyors
- Diverters
- Offload, Sorting and Delivery Conveyors
- ASRS Systems

ENGINEERED &  
SPECIALTY BELTS

# OTHER INDUSTRIES



## MEDICAL INDUSTRY

Megadyne offers several synchronous and non-synchronous clean running options for both light-duty power transmission, positioning, and product handling applications.

- Medical Equipment:
  - MRI Tables
  - Blood Centrifuge
- Automated Pharmaceutical Dispensers
- Medical Instrumentation



## ROBOTICS & AUTOMATION

Urethane and rubber high-strength synchronous belts are being increasingly incorporated into robotic positioning applications; these commonly include pick and place systems, and applications where positional accuracy is required.

- 3D Printing
- Fiber Optics
- X,Y Drives
- Swimming Pool Cleaners
- Security Camera Positioning
- Theatre Lighting Positioning
- Automotive Assembly Welding Systems



## PAPER & PRINT

From a broad range of elastomer options, Megadyne can provide the right combination of substrate and cover materials to yield wear-resistance, the right coefficient of friction, and antistatic requirements. Megadyne specializes in modifications such as holes or slots, counter slots, and vacuum draws.

- Banking Equipment
- Printing Equipment
- Bindery Equipment
- Mail Handling Equipment
- Collating Machines
- Ticketing Machines
- Newspaper Equipment
- Personal Hygiene Products - Diapers, Wipes




## WOOD

Within the Wood Industry, Megadyne is able to meet all requirements - even the most challenging - with standard and specialty belts.

- Veneer Stacker
- Plywood Layup & Pressing
- Press Exit, Trimming & Inspection
- Wood Panel Conveyor


ENGINEERED &  
SPECIALTY BELTS

**... AND MANY MORE...**

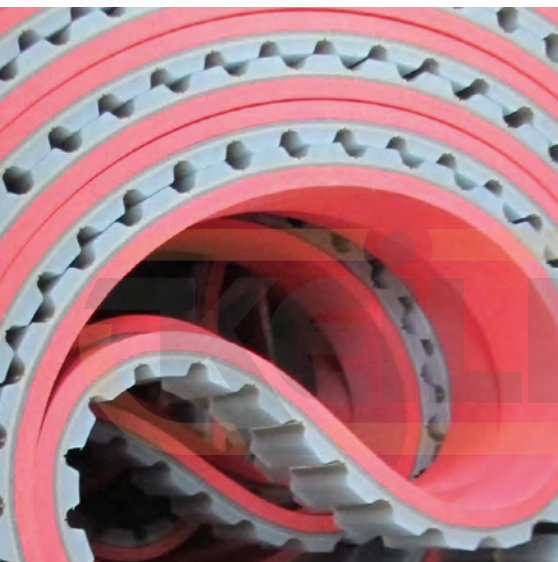

# COVERS

POLYURETHANE  
PVC  
NATURAL RUBBER  
NITRILE-NEOPRENE  
POLYCHLOROPRENE  
EPDM-VITON-HNBR  
OTHER COATING  
SILICONE

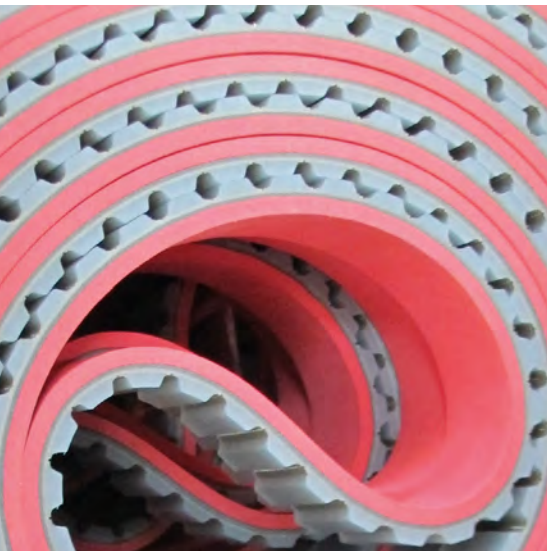

# COVERS


## MEGADYNE IS A GLOBAL LEADER IN THE DESIGN AND MANUFACTURING OF SPECIALTY AND ENGINEERED BELTS WITH COVERS

Why is this the case? It starts with our understanding of polymers. From rubber to silicone, to urethane, to impregnated fabrics, internal knowledge at Megadyne as well as that obtained from our other AMMEGA sister companies is matched with our broad process offering.

At Megadyne, we mould rubber, spin cast urethane, and Hytrel®, apply silicone and neoprene coating, spray urethane foam, and laminate materials made of urethane, PVC, rubber, fleece, artificial leather, silicone, and Kevlar®.

With our vertically integrated business model, matched with our multiple manufacturing processes, and state-of-the-art modification equipment, Megadyne is well positioned to offer you high-quality, consistently produced products. No one manufacturer of Engineered Specialty belts provides more solutions.

### PRODUCT AVAILABILITY



### COVER COLOUR KEY

#### RESISTANCE<sup>1</sup> QUALITY LEVELS

|           |      |
|-----------|------|
| Poor      | ●○○○ |
| Fair      | ●●○○ |
| Good      | ●●●○ |
| Very Good | ●●●● |

<sup>1</sup> In relation to Water, Abrasion and Oil Resistances of the cover material.

|             |                   |                |
|-------------|-------------------|----------------|
| Orange      | Yellow            | Blue FDA       |
| PU Cream    | White             | High Duro Pink |
| PU Blue     | Tan               | Dark Gray      |
| Gray        | Sylomer Blue      | Royal Blue     |
| Transparent | Transparent Brown | Black          |
| Red Grip    | Celloflex Tan     | Dark Red       |
| Red         | Dark Green        | Brown          |
| Mint Green  | Blue Anti Glaze   | Coral          |

### IMPORTANT COVER INFORMATION

The following information provides explanation for the asterisk found within the cover section (8-34).

**\*Coefficient of Friction (CoF):** Determined by the static value against a steel guide; however, consideration must be given to the specific environmental conditions (contamination and/or wear resistance) and aging on the cover

**\*\*Oil Resistance:** Dependant upon the exact chemical nature and viscosity of the oil

**\*\*\*Ground Covers** can yield a tighter tolerance of +/-0.3mm if required

**\*\*\*\*Minimum Pulley Diameter (Pd)** = desired cover thickness x given multiplier: i.e. 2mm cover thickness x 30 (given) = 60mm min. Pd. If the minimum diameter of base belt is larger than the calculated cover minimum Pd, use the larger of the two values.

**\*\*\*\*\*Minimum Pulley Diameter (Pd)** = Total Belt Thickness (TK)x5

ENGINEERED &  
SPECIALTY BELTS






# COVERS: POLYURETHANE

AVAFC 60

AVAFC 70

AVAFC 85

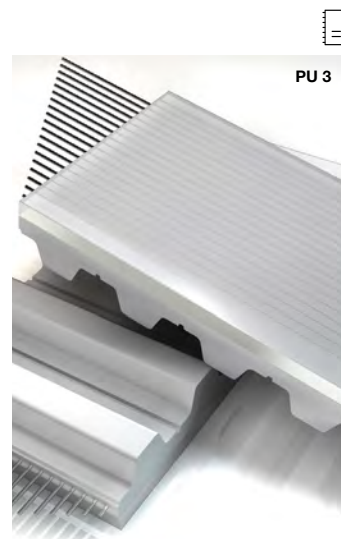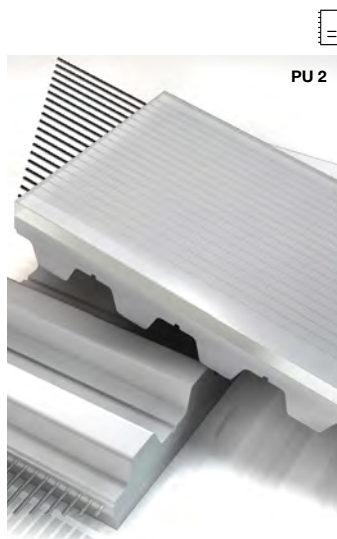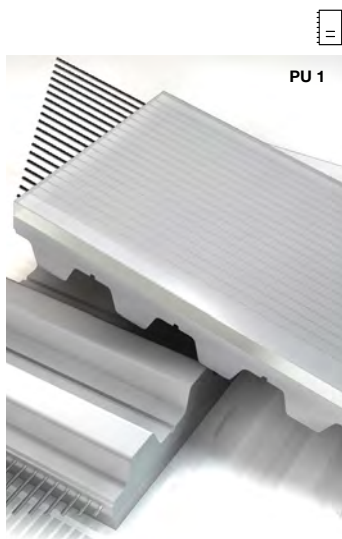

|                                     |                                                                                                 |                                                                                                 |                                                                          |
|-------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| SOURCE LOCATION                     | ITALY, USA                                                                                      | ITALY, USA                                                                                      | ITALY, USA                                                               |
| COLOURS                             | ○                                                                                               | ○                                                                                               | ○                                                                        |
| RAW MATERIAL                        | PU                                                                                              | PU                                                                                              | PU                                                                       |
| HARDNESS (ShA)                      | 60                                                                                              | 70                                                                                              | 85                                                                       |
| COVER AND BELT COHESION METHOD      | CO-EXTRUSION                                                                                    | CO-EXTRUSION                                                                                    | CO-EXTRUSION                                                             |
| STANDARD COVER THICKNESS RANGE (mm) | 2/3/4                                                                                           | 2/3/4                                                                                           | 2/3/4                                                                    |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                                         | +/- 0.3                                                                                         | +/- 0.3                                                                  |
| WORKING TEMPERATURE (°C)            | -20 /+80                                                                                        | -20 /+80                                                                                        | -20 /+80                                                                 |
| COEFFICIENT OF FRICTION* (CoF)      | 0.65                                                                                            | 0.65                                                                                            | 0.60                                                                     |
| MIN. PULLEY DIAMETER                | x 40                                                                                            | x 40                                                                                            | x 40                                                                     |
| WATER RESISTANCE                    | ●●●○                                                                                            | ●●●●                                                                                            | ●●●○                                                                     |
| ABRASION RESISTANCE                 | ●●●○                                                                                            | ●●●○                                                                                            | ●●●●                                                                     |
| OIL RESISTANCE**                    | ●●●○                                                                                            | ●●○○                                                                                            | ●●●○                                                                     |
| FEATURES/BENEFITS                   | High-friction on smooth and dry surfaces. Available in different colour under respecting a MOQ. | High-friction on smooth and dry surfaces. Available in different colour under respecting a MOQ. | Very good wear-resistance. Suitable for conveying sharp-edged materials. |
| FOOD CONTACT APPROVED               | NO                                                                                              | NO                                                                                              | NO                                                                       |
| FDA APPROVED                        |                                                                                                 |                                                                                                 |                                                                          |
| EU REGULATIONS                      |                                                                                                 |                                                                                                 |                                                                          |

|            |  |  |  |
|------------|--|--|--|
| INDUSTRIES |  |  |  |
|------------|--|--|--|

ENGINEERED & SPECIALTY BELTS




# COVERS: POLYURETHANE


PU FISHBONE

PU RIBBED

NP 385

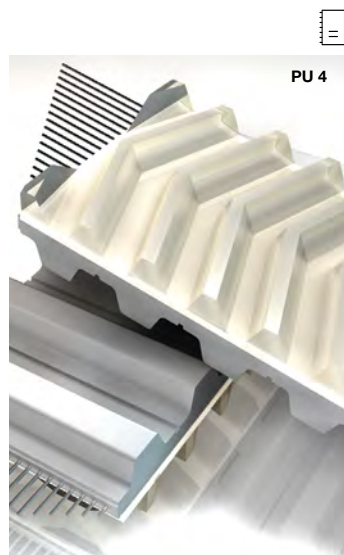

PU 4

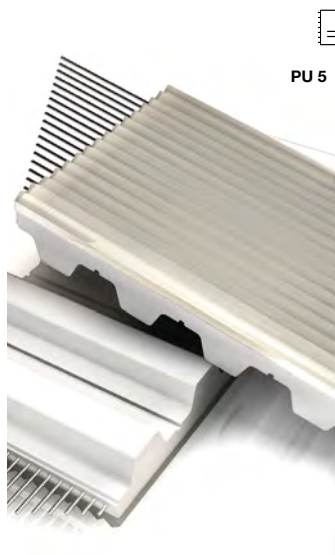

PU 5



PU 6

| SOURCE LOCATION                     | ITALY, USA                                                               | ITALY, USA                                                                    | ITALY                                                            |
|-------------------------------------|--------------------------------------------------------------------------|-------------------------------------------------------------------------------|------------------------------------------------------------------|
| COLOURS                             | ○                                                                        | ○                                                                             | ○                                                                |
| RAW MATERIAL                        | PU                                                                       | PU                                                                            | PU                                                               |
| HARDNESS (ShA)                      | 70                                                                       | 70                                                                            | 70                                                               |
| COVER AND BELT COHESION METHOD      | CO-EXTRUSION                                                             | CO-EXTRUSION                                                                  | CO-EXTRUSION                                                     |
| STANDARD COVER THICKNESS RANGE (mm) | 4.3                                                                      | 2.7                                                                           | 4                                                                |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.5                                                                  | +/- 0.5                                                                       | +/- 0.3                                                          |
| WORKING TEMPERATURE (°C)            | -20 /+80                                                                 | -20 /+80                                                                      | -20 /+80                                                         |
| COEFFICIENT OF FRICTION* (CoF)      | 0.60                                                                     | 0.60                                                                          | 0.60                                                             |
| MIN. PULLEY DIAMETER                | x 30                                                                     | x 35                                                                          | x 40                                                             |
| WATER RESISTANCE                    | ●●●●                                                                     | ●●●●                                                                          | ●●●○                                                             |
| ABRASION RESISTANCE                 | ●●●○                                                                     | ●●●○                                                                          | ●●●●                                                             |
| OIL RESISTANCE**                    | ●●○○                                                                     | ●●○○                                                                          | ●●●○                                                             |
| FEATURES/BENEFITS                   | Suitable for wet environments where friction and drainage are necessary. | Reduced contact point for conveying smooth products. Allows drain of liquids. | For oily conveyor conditions. Contact only on top of the Noppen. |
| FOOD CONTACT APPROVED               | NO                                                                       | NO                                                                            | NO                                                               |
| FDA APPROVED                        |                                                                          |                                                                               |                                                                  |
| EU REGULATIONS                      |                                                                          |                                                                               |                                                                  |

## INDUSTRIES



## ENGINEERED & SPECIALTY BELTS

Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.




# COVERS: POLYURETHANE

## RED GRIP

## ORANGE COVER

## Z-COVER

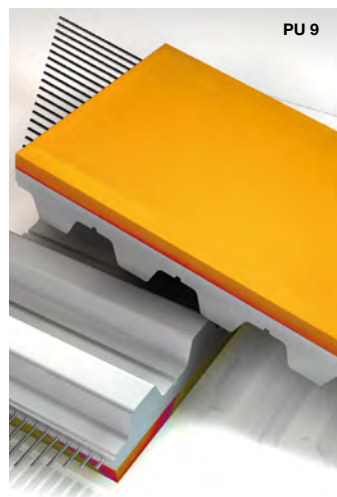

| SOURCE LOCATION                     | ITALY                                                                               | USA                                                                                        | ITALY, USA                                                                            |
|-------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| COLOURS                             |  |         |  |
| RAW MATERIAL                        | PU/SYNTHETIC RUBBER                                                                 | PU                                                                                         | PU                                                                                    |
| HARDNESS (SHA)                      | 63 +/-4                                                                             | 42                                                                                         | 56                                                                                    |
| COVER AND BELT COHESION METHOD      | CO-EXTRUSION                                                                        | CO-EXTRUSION                                                                               | CO-EXTRUSION                                                                          |
| STANDARD COVER THICKNESS RANGE (mm) | 1 to 8                                                                              | 3/6/9                                                                                      | 3/6                                                                                   |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                             | +/- 0.3                                                                                    | +/- 0.3                                                                               |
| WORKING TEMPERATURE (°C)            | -20 /+60                                                                            | -25 /+65                                                                                   | -25 /+70                                                                              |
| COEFFICIENT OF FRICTION* (CoF)      | 0.70                                                                                | 0.80                                                                                       | 0.60                                                                                  |
| MIN. PULLEY DIAMETER                | x 30                                                                                | x 20                                                                                       | x 25                                                                                  |
| WATER RESISTANCE                    | ●●●○                                                                                | ●●●○                                                                                       | ●●●○                                                                                  |
| ABRASION RESISTANCE                 | ●●●●                                                                                | ●●●○                                                                                       | ●●●○                                                                                  |
| OIL RESISTANCE**                    | ●●●●                                                                                | ●●●○                                                                                       | ●●●○                                                                                  |
| FEATURES/BENEFITS                   | Seamless alternative to Natural Rubber.<br>Only available on MEGAFLEX.              | Cover offering high-grip,<br>good wear, and oil resistance.<br>Available on MEGAFLEX only. | High-density, high CoF PU foam with<br>good resistance to oil, and abrasion.          |
| FOOD CONTACT APPROVED               | NO                                                                                  | NO                                                                                         | NO                                                                                    |
| FDA APPROVED                        |                                                                                     |                                                                                            |                                                                                       |
| EU REGULATIONS                      |                                                                                     |                                                                                            |                                                                                       |

## INDUSTRIES



ENGINEERED &  
SPECIALTY BELTS






# COVERS: POLYURETHANE

## GREEN MILLABLE URETHANE 40, 50, 60, 70, 85

## BLACK MILLABLE URETHANE

## POLYTHAN D44

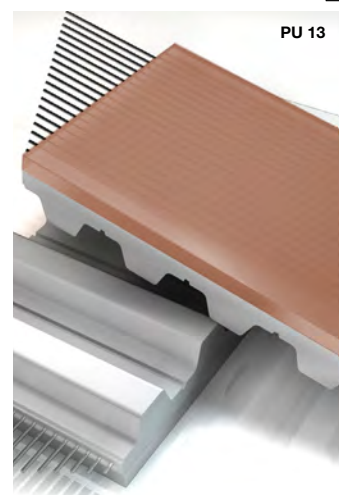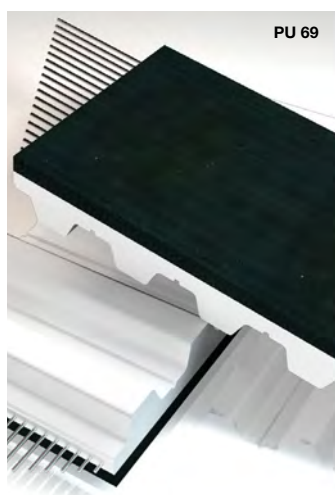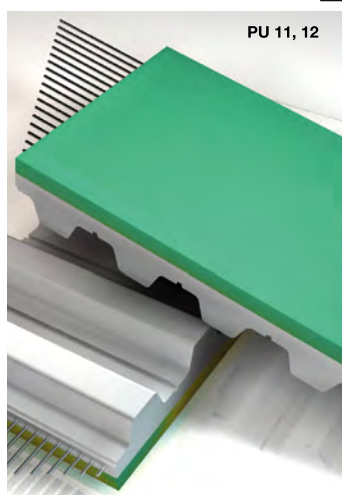

| SOURCE LOCATION                     | USA                                                                                          |    |      |    |      | USA                                                                                      | ITALY                                                                                                                                |
|-------------------------------------|----------------------------------------------------------------------------------------------|----|------|----|------|------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| COLOURS                             |           |    |      |    |      |       |                                                 |
| RAW MATERIAL                        | MILLABLE URETHANE                                                                            |    |      |    |      | MILLABLE URETHANE                                                                        | PU                                                                                                                                   |
| HARDNESS (ShA)                      | 40                                                                                           | 50 | 60   | 70 | 85   | 80                                                                                       | 72                                                                                                                                   |
| COVER AND BELT COHESION METHOD      | MOLDING                                                                                      |    |      |    |      | MOLDING                                                                                  | LAMINATION                                                                                                                           |
| STANDARD COVER THICKNESS RANGE (mm) | 2.4 to 14                                                                                    |    |      |    |      | 2.4 to 14                                                                                | 1 to 6                                                                                                                               |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                                      |    |      |    |      | +/- 0.3                                                                                  | +/- 0.5                                                                                                                              |
| WORKING TEMPERATURE (°C)            | -20 /+80                                                                                     |    |      |    |      | -20 /+80                                                                                 | -10 /+60                                                                                                                             |
| COEFFICIENT OF FRICTION* (CoF)      | 0.60                                                                                         |    | 0.55 |    |      | 0.55                                                                                     | 0.70                                                                                                                                 |
| MIN. PULLEY DIAMETER                | x 30                                                                                         |    | x 35 |    | x 40 | x 40                                                                                     | x 30                                                                                                                                 |
| WATER RESISTANCE                    |           |    |      |    |      |      |                                                 |
| ABRASION RESISTANCE                 |           |    |      |    |      |      |                                                 |
| OIL RESISTANCE**                    |           |    |      |    |      |      |                                                 |
| FEATURES/BENEFITS                   | Very good abrasion resistance with a high CoF. Commonly used in the Cable and Wire Industry. |    |      |    |      | Very good abrasion and tear-resistance. Formulated with ingredients considered FDA safe. | Good resistance against Ozone and UV radiation. Cut resistance makes it a good option to convey sheets and panels of wood and glass. |
| FOOD CONTACT APPROVED               | NO                                                                                           |    |      |    |      | YES                                                                                      | NO                                                                                                                                   |
| FDA APPROVED                        |                                                                                              |    |      |    |      | YES                                                                                      |                                                                                                                                      |
| EU REGULATIONS                      |                                                                                              |    |      |    |      |                                                                                          |                                                                                                                                      |

| INDUSTRIES |  |  |  |
|------------|--|--|--|
|------------|--|--|--|

ENGINEERED &  
SPECIALTY BELTS

Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.




# COVERS: POLYURETHANE

## CELLOFLEX

## PU-YELLOW

## PU - GREY/RED

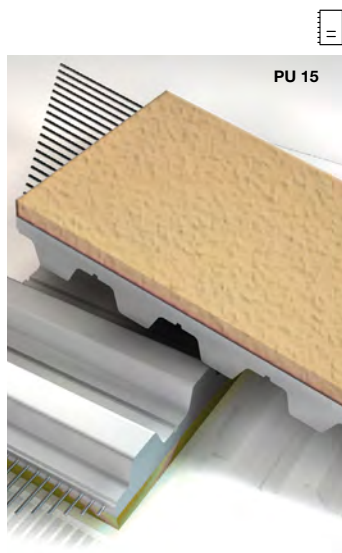

|                                            |                                                                                                                           |                                                                                                                          |                                                                                                                          |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>SOURCE LOCATION</b>                     | ITALY, USA                                                                                                                | ITALY                                                                                                                    | ITALY                                                                                                                    |
| <b>COLOURS</b>                             |                                                                                                                           |                                                                                                                          |                                                                                                                          |
| <b>RAW MATERIAL</b>                        | MICRO-CELLULAR PU                                                                                                         | TWO COMPONENT PU FOAM                                                                                                    | TWO COMPONENT PU FOAM                                                                                                    |
| <b>HARDNESS (ShA)</b>                      | 350 kg/m <sup>3</sup>                                                                                                     | SOFT: 35-40, STD: 50, HARD: 60-70                                                                                        | SOFT: 35-40, STD: 50, HARD: 60-70                                                                                        |
| <b>COVER AND BELT COHESION METHOD</b>      | LAMINATION                                                                                                                | SEAMLESS SPRAYING - LAMINATION                                                                                           | SEAMLESS SPRAYING                                                                                                        |
| <b>STANDARD COVER THICKNESS RANGE (mm)</b> | 2 to 5                                                                                                                    | 1 to 10                                                                                                                  | 1 to 10                                                                                                                  |
| <b>TOLERANCE COVER THICKNESS (mm)</b>      | +/- 0.5                                                                                                                   | +/- 0.3                                                                                                                  | +/- 0.3                                                                                                                  |
| <b>WORKING TEMPERATURE (°C)</b>            | -30 /+80                                                                                                                  | -10 /+60                                                                                                                 | -10 /+60                                                                                                                 |
| <b>COEFFICIENT OF FRICTION* (CoF)</b>      | 0.30                                                                                                                      | 0.40                                                                                                                     | 0.40                                                                                                                     |
| <b>MIN. PULLEY DIAMETER</b>                | x 20                                                                                                                      | x 25                                                                                                                     | x 25                                                                                                                     |
| <b>WATER RESISTANCE</b>                    | ● ○ ○ ○                                                                                                                   | ● ● ○ ○                                                                                                                  | ● ● ○ ○                                                                                                                  |
| <b>ABRASION RESISTANCE</b>                 | ● ● ○ ○                                                                                                                   | ● ● ● ●                                                                                                                  | ● ● ● ●                                                                                                                  |
| <b>OIL RESISTANCE**</b>                    | ● ○ ○ ○                                                                                                                   | ● ● ● ○                                                                                                                  | ● ● ● ○                                                                                                                  |
| <b>FEATURES/BENEFITS</b>                   | Highly flexible, good shock absorption. Use to move sensitive and fragile products. Better resistance than sylomer foams. | Very good abrasion resistance and high-grip against paper. Good machineability for vacuum holes and other modifications. | Very good abrasion resistance and high-grip against paper. Good machineability for vacuum holes and other modifications. |
| <b>FOOD CONTACT APPROVED</b>               | NO                                                                                                                        | NO                                                                                                                       | NO                                                                                                                       |
| <b>FDA APPROVED</b>                        |                                                                                                                           |                                                                                                                          |                                                                                                                          |
| <b>EU REGULATIONS</b>                      |                                                                                                                           |                                                                                                                          |                                                                                                                          |

## INDUSTRIES



ENGINEERED &  
SPECIALTY BELTS






# COVERS: POLYURETHANE

## SYLOMER YELLOW

## SYLOMER BLUE

## SYLOMER GREEN

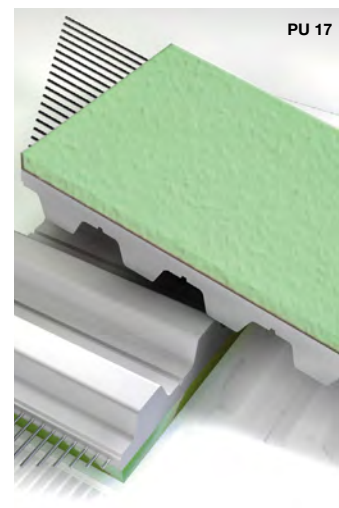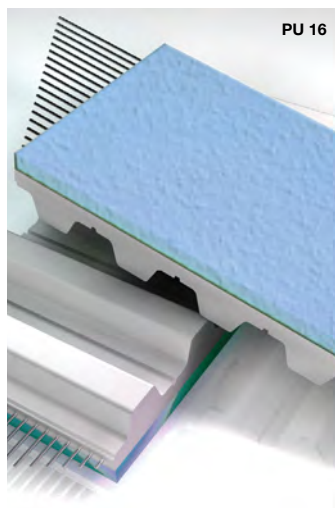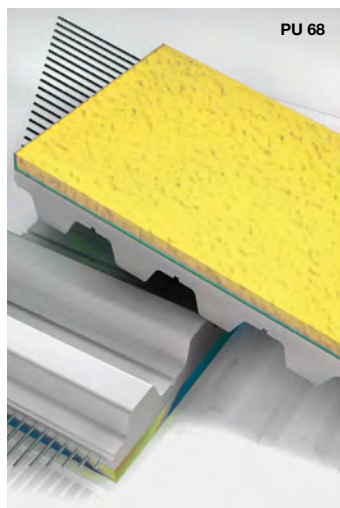

| SOURCE LOCATION                     | ITALY, USA                                                                          | ITALY, USA                                                                           | ITALY, USA                                                                            |
|-------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| COLOURS                             |  |   |  |
| RAW MATERIAL                        | PU Foam                                                                             | PU Foam                                                                              | PU Foam                                                                               |
| HARDNESS (ShA)                      | 150 kg/m <sup>3</sup>                                                               | 220 kg/m <sup>3</sup>                                                                | 300 kg/m <sup>3</sup>                                                                 |
| COVER AND BELT COHESION METHOD      | LAMINATION                                                                          | LAMINATION                                                                           | LAMINATION                                                                            |
| STANDARD COVER THICKNESS RANGE (mm) | 1 to 12                                                                             | 2 to 20                                                                              | 2 to 20                                                                               |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.25                                                                            | +/- 0.5                                                                              | +/- 0.5                                                                               |
| WORKING TEMPERATURE (°C)            | -30 /+70                                                                            | -30 /+70                                                                             | -30 /+70                                                                              |
| COEFFICIENT OF FRICTION* (CoF)      | 0.50                                                                                | 0.50                                                                                 | 0.50                                                                                  |
| MIN. PULLEY DIAMETER                | Ø min. +TKx5(*****)                                                                 | x 15                                                                                 | x 15                                                                                  |
| WATER RESISTANCE                    | ●●●○                                                                                | ●●●○                                                                                 | ●●●○                                                                                  |
| ABRASION RESISTANCE                 | ●○○○                                                                                | ●○○○                                                                                 | ●○○○                                                                                  |
| OIL RESISTANCE**                    | ●○○○                                                                                | ●○○○                                                                                 | ●○○○                                                                                  |
| FEATURES/BENEFITS                   | High-dynamic load capacity for movement of light and sensitive parts.               | 10 ShA offers high dynamic load capacity for handling of lightweight, fragile items. | 15 ShA offers high dynamic load capacity for top pressure belts.                      |
| FOOD CONTACT APPROVED               | NO                                                                                  | NO                                                                                   | NO                                                                                    |
| FDA APPROVED                        |                                                                                     |                                                                                      |                                                                                       |
| EU REGULATIONS                      |                                                                                     |                                                                                      |                                                                                       |

## INDUSTRIES



## ENGINEERED & SPECIALTY BELTS

Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.





# COVERS: POLYURETHANE/PVC

## SYLOMER BROWN

## APL RED

## APL SUPERGRIP

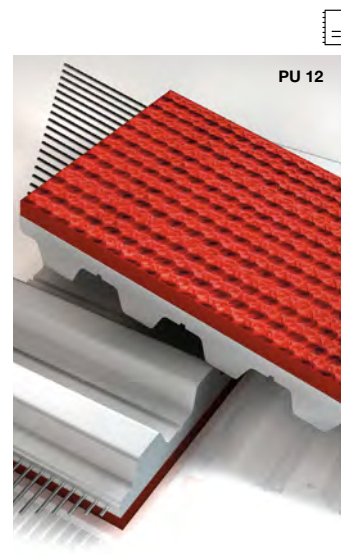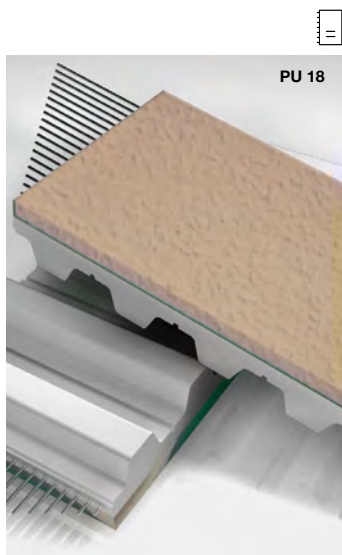

|                                     |                                                             |                                                                                                   |                                                                                                                                                                                                                                    |
|-------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SOURCE LOCATION                     | ITALY, USA                                                  | ITALY                                                                                             | ITALY                                                                                                                                                                                                                              |
| COLOURS                             |                                                             |                                                                                                   |                                                                                                                                                                                                                                    |
| RAW MATERIAL                        | PU Foam                                                     | PVC                                                                                               | PVC                                                                                                                                                                                                                                |
| HARDNESS (ShA)                      | 400 kg/m <sup>3</sup>                                       | 55                                                                                                | 55                                                                                                                                                                                                                                 |
| COVER AND BELT COHESION METHOD      | LAMINATION                                                  | CO-EXTRUSION                                                                                      | CO-EXTRUSION                                                                                                                                                                                                                       |
| STANDARD COVER THICKNESS RANGE (mm) | 1 to 12                                                     | 3.5                                                                                               | 5.2                                                                                                                                                                                                                                |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.5                                                     | +/- 0.3                                                                                           | +/- 0.5                                                                                                                                                                                                                            |
| WORKING TEMPERATURE (°C)            | -30 /+70                                                    | -20 /+60                                                                                          | -20 /+60                                                                                                                                                                                                                           |
| COEFFICIENT OF FRICTION* (CoF)      | 0.50                                                        | 0.70                                                                                              | 0.60                                                                                                                                                                                                                               |
| MIN. PULLEY DIAMETER                | x 20                                                        | x 30                                                                                              | x 30                                                                                                                                                                                                                               |
| WATER RESISTANCE                    | ●●●○                                                        | ●●●○                                                                                              | ●●●○                                                                                                                                                                                                                               |
| ABRASION RESISTANCE                 | ●●○○                                                        | ●●●○                                                                                              | ●●●○                                                                                                                                                                                                                               |
| OIL RESISTANCE**                    | ●○○○                                                        | ●●●○                                                                                              | ●●●○                                                                                                                                                                                                                               |
| FEATURES/BENEFITS                   | 22 ShA, offers high dynamic load capacity for moving glass. | Seamless alternative to Natural Rubber. Blended elastomer offering high CoF, good oil resistance. | Cover offering high friction rough top surface, applicable for slight height compensation, low shock absorption capabilities. Improved adhesion even in case of moisture and dirt for use on lower angle incline product movement. |
| FOOD CONTACT APPROVED               | NO                                                          | NO                                                                                                | NO                                                                                                                                                                                                                                 |
| FDA APPROVED                        |                                                             |                                                                                                   |                                                                                                                                                                                                                                    |
| EU REGULATIONS                      |                                                             |                                                                                                   |                                                                                                                                                                                                                                    |

## INDUSTRIES



ENGINEERED &  
SPECIALTY BELTS





# COVERS: PVC

PVC-FOIL BLUE

PVC-FOIL WHITE

SUPERGRIP PETROL

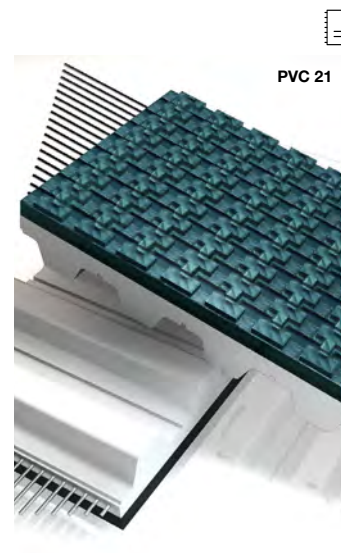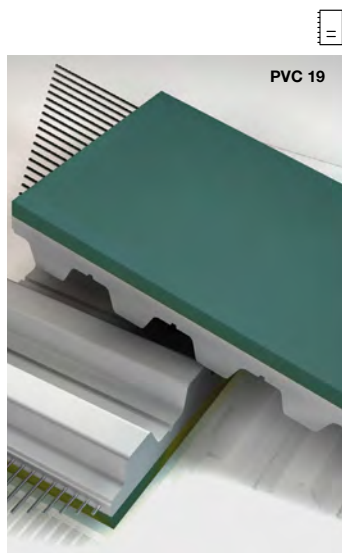

| SOURCE LOCATION                     | ITALY, USA                                                                                                                                                  | ITALY, USA                                                                                                                                                                       | ITALY, USA                                                                                                                                                                                                           |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| COLOURS                             |                                                                          |                                                                                               |                                                                                                                                 |
| RAW MATERIAL                        | PVC                                                                                                                                                         | PVC                                                                                                                                                                              | PVC                                                                                                                                                                                                                  |
| HARDNESS (ShA)                      | 40                                                                                                                                                          | 65                                                                                                                                                                               | 46                                                                                                                                                                                                                   |
| COVER AND BELT COHESION METHOD      | LAMINATION                                                                                                                                                  | LAMINATION                                                                                                                                                                       | CO-EXTRUSION - LAMINATION                                                                                                                                                                                            |
| STANDARD COVER THICKNESS RANGE (mm) | 2                                                                                                                                                           | 2                                                                                                                                                                                | 4.5                                                                                                                                                                                                                  |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.5                                                                                                                                                     | +/- 0.5                                                                                                                                                                          | +/- 0.5                                                                                                                                                                                                              |
| WORKING TEMPERATURE (°C)            | -15 /+70                                                                                                                                                    | -20 /+100                                                                                                                                                                        | -10 /+60                                                                                                                                                                                                             |
| COEFFICIENT OF FRICTION* (CoF)      | 0.90                                                                                                                                                        | 0.80                                                                                                                                                                             | 0.90                                                                                                                                                                                                                 |
| MIN. PULLEY DIAMETER                | 40 mm                                                                                                                                                       | 60 mm                                                                                                                                                                            | 60 mm                                                                                                                                                                                                                |
| WATER RESISTANCE                    | ●●●○                                                                                                                                                        | ●●●○                                                                                                                                                                             | ●●●○                                                                                                                                                                                                                 |
| ABRASION RESISTANCE                 | ●●○○                                                                                                                                                        | ●●●○                                                                                                                                                                             | ●●○○                                                                                                                                                                                                                 |
| OIL RESISTANCE**                    | ●●●○                                                                                                                                                        | ●●●●                                                                                                                                                                             | ●●●○                                                                                                                                                                                                                 |
| FEATURES/BENEFITS                   | Good adhesion characteristics due to good CoF and smooth surface for the conveyance of paper and foils, wood and plastics. Seamless weldable on ML and MFX. | Good adhesion characteristics due to good CoF and smooth surface. Resistant to acids and oils. Formulated with ingredients considered FDA safe. Seamless weldable on ML and MFX. | Applicable for slight height compensation, low shock absorption capabilities. Improved adhesion even with moisture and dirt for incline, feed and take-away conveying applications. Seamless weldable on ML and MFX. |
| FOOD CONTACT APPROVED               | NO                                                                                                                                                          | YES                                                                                                                                                                              | NO                                                                                                                                                                                                                   |
| FDA APPROVED                        |                                                                                                                                                             | YES                                                                                                                                                                              |                                                                                                                                                                                                                      |
| EU REGULATIONS                      |                                                                                                                                                             | YES                                                                                                                                                                              |                                                                                                                                                                                                                      |

## INDUSTRIES



## ENGINEERED & SPECIALTY BELTS

Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.



# COVERS: PVC

## SUPERGRIP WHITE

## PVC-SAW-TOOTH

## PVC-NAPPED



PVC 22



PVC 23



PVC 24



| SOURCE LOCATION                     | ITALY, USA                                                                                                                 | ITALY, USA                                                                                                     | ITALY, USA                                                                                                      |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| COLOURS                             |                                                                                                                            |                                                                                                                |                                                                                                                 |
| RAW MATERIAL                        | PVC                                                                                                                        | PVC                                                                                                            | PVC                                                                                                             |
| HARDNESS (ShA)                      | 60                                                                                                                         | 60 +/-4                                                                                                        | 65                                                                                                              |
| COVER AND BELT COHESION METHOD      | LAMINATION                                                                                                                 | LAMINATION                                                                                                     | LAMINATION                                                                                                      |
| STANDARD COVER THICKNESS RANGE (mm) | 3.0                                                                                                                        | 2.5                                                                                                            | 1.5                                                                                                             |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.5                                                                                                                    | +/- 0.5                                                                                                        | +/- 0.5                                                                                                         |
| WORKING TEMPERATURE (°C)            | -10 /+100                                                                                                                  | -15 /+70                                                                                                       | -15 /+60                                                                                                        |
| COEFFICIENT OF FRICTION* (CoF)      | 0.80                                                                                                                       | 0.70                                                                                                           | 0.80                                                                                                            |
| MIN. PULLEY DIAMETER                | 60 mm                                                                                                                      | 60 mm                                                                                                          | 60 mm                                                                                                           |
| WATER RESISTANCE                    | ●●●○                                                                                                                       | ●●●○                                                                                                           | ●●●○                                                                                                            |
| ABRASION RESISTANCE                 | ●●○○                                                                                                                       | ●●○○                                                                                                           | ●●○○                                                                                                            |
| OIL RESISTANCE**                    | ●●●●                                                                                                                       | ●●●●                                                                                                           | ●●●●                                                                                                            |
| FEATURES/BENEFITS                   | Characteristics same as Supergrip petrol but less flexible. For the conveyance of food. Resistant against acids and bases. | FDA clear pattern for improved adhesion under wet conditions. Line contact, resistant against acids and bases. | Thin cover offers good CoF, even in wet conditions. Resistant to acids and oils. Formulated with FDA materials. |
| FOOD CONTACT APPROVED               | YES                                                                                                                        | YES                                                                                                            | YES                                                                                                             |
| FDA APPROVED                        | YES                                                                                                                        | YES                                                                                                            | YES                                                                                                             |
| EU REGULATIONS                      | YES                                                                                                                        | YES                                                                                                            | YES                                                                                                             |

## INDUSTRIES



ENGINEERED &  
SPECIALTY BELTS



# COVERS: PVC


## PVC FISHBONE

## MINIGRIP GREEN


## STAGGERED SAWTOOTH



PVC 25

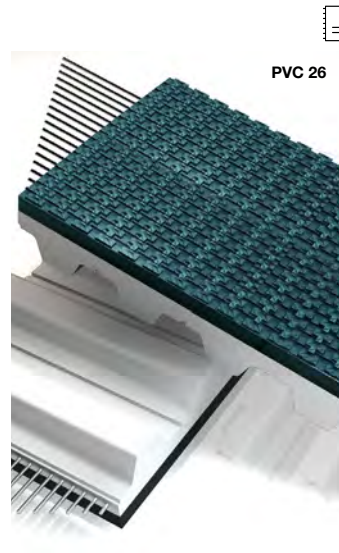

PVC 26

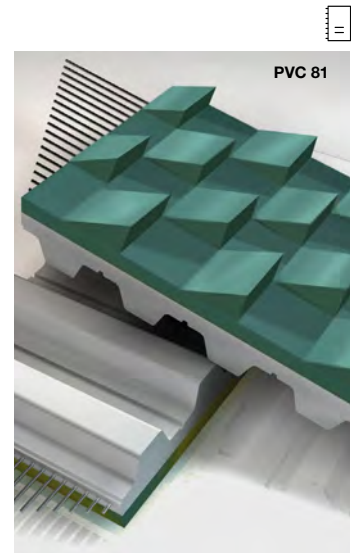

PVC 81

| SOURCE LOCATION                     | ITALY                                                                                                                                                 | ITALY, USA                                                                                                                       | ITALY, USA                                                                     |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| COLOURS                             |                                                                                                                                                       |                                                                                                                                  |                                                                                |
| RAW MATERIAL                        | PVC                                                                                                                                                   | PVC                                                                                                                              | PVC                                                                            |
| HARDNESS (ShA)                      | 65                                                                                                                                                    | 60                                                                                                                               | 46                                                                             |
| COVER AND BELT COHESION METHOD      | LAMINATION                                                                                                                                            | CO-EXTRUSION - LAMINATION                                                                                                        | LAMINATION                                                                     |
| STANDARD COVER THICKNESS RANGE (mm) | 3                                                                                                                                                     | 1.3                                                                                                                              | 8                                                                              |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.5                                                                                                                                               | +/- 0.5                                                                                                                          | +/- 0.5                                                                        |
| WORKING TEMPERATURE (°C)            | -15 /+90                                                                                                                                              | -10 /+70                                                                                                                         | -20 /+70                                                                       |
| COEFFICIENT OF FRICTION* (CoF)      | 0.60                                                                                                                                                  | 0.70                                                                                                                             | 0.90                                                                           |
| MIN. PULLEY DIAMETER                | x 30                                                                                                                                                  | 30 mm                                                                                                                            | 60 mm                                                                          |
| WATER RESISTANCE                    | ●●●○                                                                                                                                                  | ●●●○                                                                                                                             | ●●●○                                                                           |
| ABRASION RESISTANCE                 | ●●●○                                                                                                                                                  | ●●○○                                                                                                                             | ●●●○                                                                           |
| OIL RESISTANCE**                    | ●●●●                                                                                                                                                  | ●●●○                                                                                                                             | ●●●○                                                                           |
| FEATURES/BENEFITS                   | Improved CoF in wet conditions. Narrow belts may only have a single diagonal-cut profile. Resistant to acids and oils. Formulated with FDA materials. | Thin cover structure with very good friction in wet or dusty conditions - reduces frictional stick. Resistant to acids and oils. | Very good CoF for gripping and incline conveying. Resistant to acids and oils. |
| FOOD CONTACT APPROVED               | YES                                                                                                                                                   | NO                                                                                                                               | NO                                                                             |
| FDA APPROVED                        | YES                                                                                                                                                   |                                                                                                                                  |                                                                                |
| EU REGULATIONS                      | YES                                                                                                                                                   |                                                                                                                                  |                                                                                |

## INDUSTRIES



## ENGINEERED & SPECIALTY BELTS

Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.



# COVERS: NATURAL RUBBER

## LINATEX™ RED

## LINARD

## LINAPLUS FG



| SOURCE LOCATION                     | ITALY, USA                                                                                                                                  |  | USA           | ITALY, USA                                                                               |  | ITALY, USA                                                                         |  |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--|---------------|------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------|--|
| COLOURS                             | ●                                                                                                                                           |  |               | ●                                                                                        |  | ●                                                                                  |  |
| RAW MATERIAL                        | NATURAL RUBBER                                                                                                                              |  |               | NATURAL RUBBER                                                                           |  | NATURAL RUBBER                                                                     |  |
| HARDNESS (ShA)                      | 38                                                                                                                                          |  | 40            | 60                                                                                       |  | 38                                                                                 |  |
| COVER AND BELT COHESION METHOD      | LAMINATION                                                                                                                                  |  | VULCANIZATION | LAMINATION                                                                               |  | LAMINATION                                                                         |  |
| STANDARD COVER THICKNESS RANGE (mm) | 1 to 10                                                                                                                                     |  | 3 to 12, 7    | 1 to 6                                                                                   |  | 1 to 3                                                                             |  |
| TOLERANCE COVER THICKNESS (mm)      | +/- 1 (***)                                                                                                                                 |  |               | +/- 1 (***)                                                                              |  | +/- 1 (***)                                                                        |  |
| WORKING TEMPERATURE (°C)            | -40 / +70                                                                                                                                   |  |               | -30 / +70                                                                                |  | -40 / +70                                                                          |  |
| COEFFICIENT OF FRICTION* (CoF)      | 0.90                                                                                                                                        |  |               | 0.60                                                                                     |  | 0.75                                                                               |  |
| MIN. PULLEY DIAMETER                | x 20                                                                                                                                        |  |               | x 30                                                                                     |  | x 25                                                                               |  |
| WATER RESISTANCE                    | ●●●○                                                                                                                                        |  |               | ●●●○                                                                                     |  | ●●●○                                                                               |  |
| ABRASION RESISTANCE                 | ●●●○                                                                                                                                        |  |               | ●●●○                                                                                     |  | ●●○○                                                                               |  |
| OIL RESISTANCE**                    | ●○○○                                                                                                                                        |  |               | ●●○○                                                                                     |  | ●○○○                                                                               |  |
| FEATURES/BENEFITS                   | Cover offers high CoF, good wear resistance, good in wet conditions but poor in oil. Common used as discharge belts for use in vacuum VFFS. |  |               | Cover with high abrasion resistance but less adhesion in comparison to LINATEX™ (RU 27). |  | High CoF white non-marking natural rubber material. Formulated with FDA materials. |  |
| FOOD CONTACT APPROVED               | NO                                                                                                                                          |  |               | NO                                                                                       |  | YES                                                                                |  |
| FDA APPROVED                        |                                                                                                                                             |  |               |                                                                                          |  | YES                                                                                |  |
| EU REGULATIONS                      |                                                                                                                                             |  |               |                                                                                          |  | YES                                                                                |  |

## INDUSTRIES



ENGINEERED &  
SPECIALTY BELTS




# COVERS: NATURAL RUBBER

## LINATRILE

## RP 400 YELLOW

## CORREX BEIGE

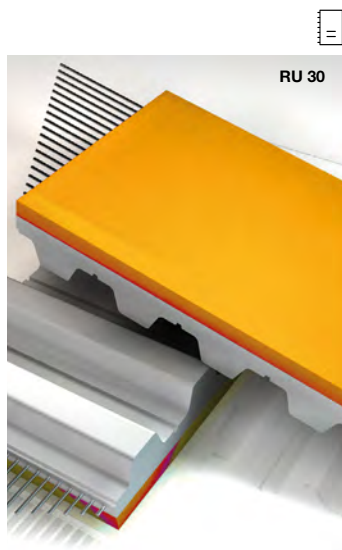

| SOURCE LOCATION                     | ITALY, USA                                                                                                                                                       | ITALY                                                                                                    | ITALY                                                                        |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| COLOURS                             |                                                                                                                                                                  |                                                                                                          |                                                                              |
| RAW MATERIAL                        | POLYMER NBR                                                                                                                                                      | CAOUTCHOUC (Natural Rubber)                                                                              | NATURAL RUBBER                                                               |
| HARDNESS (ShA)                      | 55                                                                                                                                                               | 38                                                                                                       | 36                                                                           |
| COVER AND BELT COHESION METHOD      | LAMINATION                                                                                                                                                       | LAMINATION                                                                                               | LAMINATION                                                                   |
| STANDARD COVER THICKNESS RANGE (mm) | 1 to 10                                                                                                                                                          | 2 to 6                                                                                                   | 2 to 6                                                                       |
| TOLERANCE COVER THICKNESS (mm)      | +/- 1 (***)                                                                                                                                                      | +/- 0.5                                                                                                  | +/- 0.5                                                                      |
| WORKING TEMPERATURE (°C)            | -20 /+110                                                                                                                                                        | -10 /+80                                                                                                 | -10 /+70                                                                     |
| COEFFICIENT OF FRICTION* (CoF)      | 0.70                                                                                                                                                             | 0.80                                                                                                     | 0.70                                                                         |
| MIN. PULLEY DIAMETER                | x 25                                                                                                                                                             | x 20                                                                                                     | x 20                                                                         |
| WATER RESISTANCE                    | ●●●○                                                                                                                                                             | ●●●○                                                                                                     | ●●○○                                                                         |
| ABRASION RESISTANCE                 | ●●●○                                                                                                                                                             | ●●●○                                                                                                     | ●●●○                                                                         |
| OIL RESISTANCE**                    | ●●●○                                                                                                                                                             | ●○○○                                                                                                     | ●○○○                                                                         |
| FEATURES/BENEFITS                   | Improved temperature, oil, grease and aging resistance compared to natural rubber. Good mechanical processing capability vacuum transport of oil-covered sheets. | Cover has fine fabric texture, characteristics similar to Natural Rubber but higher abrasion resistance. | Cover offers high CoF and high wear resistant features. Black contact layer. |
| FOOD CONTACT APPROVED               | NO                                                                                                                                                               | NO                                                                                                       | NO                                                                           |
| FDA APPROVED                        |                                                                                                                                                                  |                                                                                                          |                                                                              |
| EU REGULATIONS                      |                                                                                                                                                                  |                                                                                                          |                                                                              |

## INDUSTRIES



## ENGINEERED & SPECIALTY BELTS

Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.




# COVERS: NATURAL RUBBER

## CORREX BLACK

## GUMMY CORREX AMBRA PARABLOND

## TAN NATURAL RUBBER 40

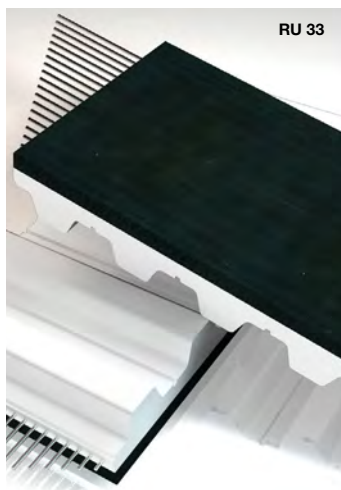

RU 33



RU 73



RU 44

| SOURCE LOCATION                     | ITALY                                                                               | ITALY                                                                                     | USA                                                                                       |
|-------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| COLOURS                             |  |        |      |
| RAW MATERIAL                        | NATURAL RUBBER                                                                      | NATURAL RUBBER                                                                            | NATURAL RUBBER                                                                            |
| HARDNESS (ShA)                      | 60                                                                                  | 48                                                                                        | 40                                                                                        |
| COVER AND BELT COHESION METHOD      | LAMINATION                                                                          | VULCANIZATION                                                                             | VULCANIZATION                                                                             |
| STANDARD COVER THICKNESS RANGE (mm) | 2 to 6                                                                              | 0.8 to 15                                                                                 | 2.4 to 14                                                                                 |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.5                                                                             | +/- 0.3                                                                                   | +/- 0.3                                                                                   |
| WORKING TEMPERATURE (°C)            | -10 /+70                                                                            | -20 /+60                                                                                  | -20 /+80                                                                                  |
| COEFFICIENT OF FRICTION* (CoF)      | 0.60                                                                                | 0.60                                                                                      | 0.60                                                                                      |
| MIN. PULLEY DIAMETER                | x 30                                                                                | x 30                                                                                      | x 20                                                                                      |
| WATER RESISTANCE                    | ●●○○                                                                                | ●●●●                                                                                      | ●●●○                                                                                      |
| ABRASION RESISTANCE                 | ●●●○                                                                                | ●●●●                                                                                      | ●●●○                                                                                      |
| OIL RESISTANCE**                    | ●○○○                                                                                | ●○○○                                                                                      | ●○○○                                                                                      |
| FEATURES/BENEFITS                   | Cover offers good abrasion resistance and lower friction than Correx Beige (RU 32). | Cover offers high CoF and higher abrasion resistance than other Natural Rubber compounds. | Cover offers non marking high CoF surface. Average wear and tear and abrasion resistance. |
| FOOD CONTACT APPROVED               | NO                                                                                  | NO                                                                                        | NO                                                                                        |
| FDA APPROVED                        |                                                                                     |                                                                                           |                                                                                           |
| EU REGULATIONS                      |                                                                                     |                                                                                           |                                                                                           |

| INDUSTRIES |  |  |  |
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|

ENGINEERED & SPECIALTY BELTS




# COVERS: NATURAL RUBBER

## BLUE ANTI GLAZE NATURAL RUBBER

## DURATAQ™

## RED NATURAL RUBBER 40

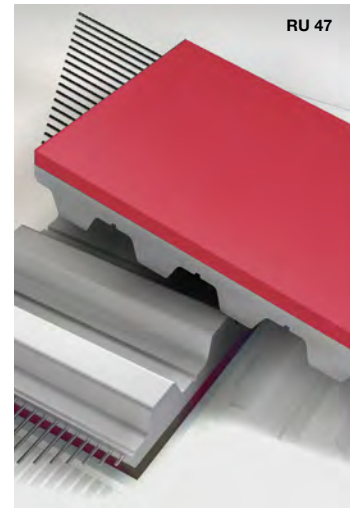

|                                     |                                                                                                                        |                                                                                                                                        |                                                                                       |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| SOURCE LOCATION                     | USA                                                                                                                    | USA                                                                                                                                    | USA                                                                                   |
| COLOURS                             |                                     |                                                     |  |
| RAW MATERIAL                        | NATURAL RUBBER                                                                                                         | NATURAL RUBBER                                                                                                                         | NATURAL RUBBER                                                                        |
| HARDNESS (ShA)                      | 40                                                                                                                     | 45                                                                                                                                     | 40                                                                                    |
| COVER AND BELT COHESION METHOD      | VULCANIZATION                                                                                                          | VULCANIZATION                                                                                                                          | VULCANIZATION                                                                         |
| STANDARD COVER THICKNESS RANGE (mm) | 2.4 to 14                                                                                                              | 2.4 to 14                                                                                                                              | 2.4 to 14                                                                             |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                                                                | +/- 0.3                                                                                                                                | +/- 0.3                                                                               |
| WORKING TEMPERATURE (°C)            | -20 /+80                                                                                                               | -20 /+100                                                                                                                              | -20 /+80                                                                              |
| COEFFICIENT OF FRICTION* (CoF)      | 0.55                                                                                                                   | 1.10                                                                                                                                   | 0.50                                                                                  |
| MIN. PULLEY DIAMETER                | x 20                                                                                                                   | x 20                                                                                                                                   | x 20                                                                                  |
| WATER RESISTANCE                    | ●●●○                                                                                                                   | ●●●○                                                                                                                                   | ●●●○                                                                                  |
| ABRASION RESISTANCE                 | ●●●○                                                                                                                   | ●●●●                                                                                                                                   | ●●○○                                                                                  |
| OIL RESISTANCE**                    | ●○○○                                                                                                                   | ●○○○                                                                                                                                   | ●○○○                                                                                  |
| FEATURES/BENEFITS                   | Cover offers a high CoF and good wear resistance. Anti glazing characteristic predestined for high speed paper feeder. | A premium Natural Rubber compound offering a custom blended proprietary rubber which has a high CoF and very good abrasion resistance. | Cover offering low durometer ShA and very good high friction.                         |
| FOOD CONTACT APPROVED               | NO                                                                                                                     | NO                                                                                                                                     | NO                                                                                    |
| FDA APPROVED                        |                                                                                                                        |                                                                                                                                        |                                                                                       |
| EU REGULATIONS                      |                                                                                                                        |                                                                                                                                        |                                                                                       |

## INDUSTRIES



## ENGINEERED & SPECIALTY BELTS

Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.



# COVERS: NATURAL RUBBER

## RED NATURAL RUBBER 60

## BLUE NATURAL RUBBER 55

## TENAX 40



| SOURCE LOCATION                     | USA                                                                                                           | USA                                                                                 | ITALY                                                                                                                    |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| COLOURS                             |                            |  |                                     |
| RAW MATERIAL                        | NATURAL RUBBER                                                                                                | NATURAL RUBBER                                                                      | NATURAL RUBBER                                                                                                           |
| HARDNESS (ShA)                      | 60                                                                                                            | 55                                                                                  | 40                                                                                                                       |
| COVER AND BELT COHESION METHOD      | VULCANIZATION                                                                                                 | VULCANIZATION                                                                       | VULCANIZATION                                                                                                            |
| STANDARD COVER THICKNESS RANGE (mm) | 2.4 to 14                                                                                                     | 2.4 to 14                                                                           | 0.8 to 15                                                                                                                |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                                                       | +/- 0.3                                                                             | +/- 0.3                                                                                                                  |
| WORKING TEMPERATURE (°C)            | -20 /+100                                                                                                     | -20 /+80                                                                            | -20 /+60                                                                                                                 |
| COEFFICIENT OF FRICTION* (CoF)      | 0.50                                                                                                          | 0.40                                                                                | 0.75                                                                                                                     |
| MIN. PULLEY DIAMETER                | x 30                                                                                                          | x 25                                                                                | x 30                                                                                                                     |
| WATER RESISTANCE                    | ●●●○                                                                                                          | ●●●○                                                                                | ●●●●                                                                                                                     |
| ABRASION RESISTANCE                 | ●●●○                                                                                                          | ●●●○                                                                                | ●●●●                                                                                                                     |
| OIL RESISTANCE**                    | ●○○○                                                                                                          | ●○○○                                                                                | ●○○○                                                                                                                     |
| FEATURES/BENEFITS                   | Covers offering good friction and good abrasion resistance. Higher abrasion resistance than Natural Rubber 40 | Cover offering high CoF, good wear resistance, very good water resistance.          | Cover is a seamless alternative to other Natural Rubber compounds. Slightly softer than Tenax Standard with higher grip. |
| FOOD CONTACT APPROVED               | NO                                                                                                            | NO                                                                                  | NO                                                                                                                       |
| FDA APPROVED                        |                                                                                                               |                                                                                     |                                                                                                                          |
| EU REGULATIONS                      |                                                                                                               |                                                                                     |                                                                                                                          |

### INDUSTRIES



ENGINEERED &  
SPECIALTY BELTS





# COVERS: NATURAL RUBBER

## TENAX STANDARD

## HONEYCOMB

## BLUE GRIP

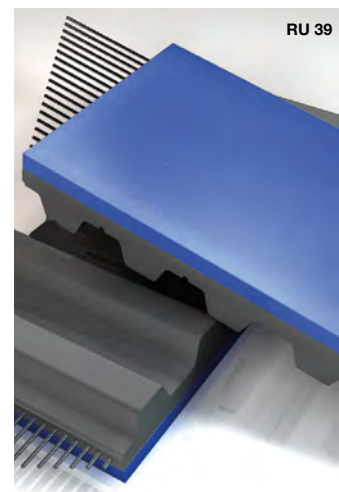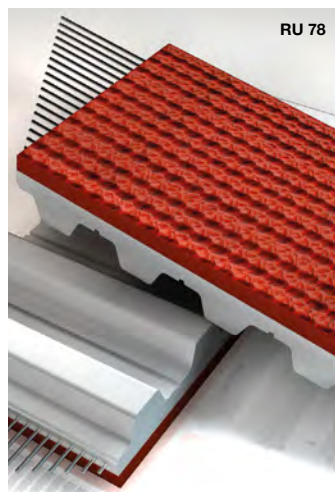

| SOURCE LOCATION                     | ITALY                                                                             | ITALY, USA                                                                                                                                                                                                                   | SPAIN                                                                                          |
|-------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| COLOURS                             |                                                                                   |                                                                                                                                                                                                                              |                                                                                                |
| RAW MATERIAL                        | NATURAL RUBBER                                                                    | NATURAL RUBBER                                                                                                                                                                                                               | NR / BR                                                                                        |
| HARDNESS (ShA)                      | 45                                                                                | 50                                                                                                                                                                                                                           | 57                                                                                             |
| COVER AND BELT COHESION METHOD      | VULCANIZATION                                                                     | LAMINATION                                                                                                                                                                                                                   | ONE SHOT CURING                                                                                |
| STANDARD COVER THICKNESS RANGE (mm) | 0.8 to 15                                                                         | 4.5 to 15                                                                                                                                                                                                                    | <=12.5 (*)                                                                                     |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                           | +/- 0.5                                                                                                                                                                                                                      | +/- 0.3                                                                                        |
| WORKING TEMPERATURE (°C)            | -20 /+60                                                                          | -20 /+60                                                                                                                                                                                                                     | -20 /+80                                                                                       |
| COEFFICIENT OF FRICTION* (CoF)      | 0.70                                                                              | 0.60                                                                                                                                                                                                                         | 0.80                                                                                           |
| MIN. PULLEY DIAMETER                | x 30                                                                              | x 30                                                                                                                                                                                                                         | Ø min. +TKx5(****)                                                                             |
| WATER RESISTANCE                    | ●●●●                                                                              | ●●●●                                                                                                                                                                                                                         | ●●○○                                                                                           |
| ABRASION RESISTANCE                 | ●●●●                                                                              | ●●●●                                                                                                                                                                                                                         | ●●●●                                                                                           |
| OIL RESISTANCE**                    | ●○○○                                                                              | ●○○○                                                                                                                                                                                                                         | ●●○○                                                                                           |
| FEATURES/BENEFITS                   | Cover is slightly harder than Tenax 40, but offers very good abrasion resistance. | Cover offering high-friction rough top surface, applicable for slight height compensation, low shock absorption capabilities. Improved adhesion even with moisture and dirt for use on lower angle incline product movement. | Very good wear resistance. Alternative to Natural Rubber. Only available on rubber base belts. |
| FOOD CONTACT APPROVED               | NO                                                                                | NO                                                                                                                                                                                                                           | NO                                                                                             |
| FDA APPROVED                        |                                                                                   |                                                                                                                                                                                                                              |                                                                                                |
| EU REGULATIONS                      |                                                                                   |                                                                                                                                                                                                                              |                                                                                                |

### INDUSTRIES



## ENGINEERED & SPECIALTY BELTS

Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.





# COVERS: NATURAL RUBBER

LOW DURO NR R34

YELLOW GUM R14

LOW DURO BLACK NEOPRENE R35

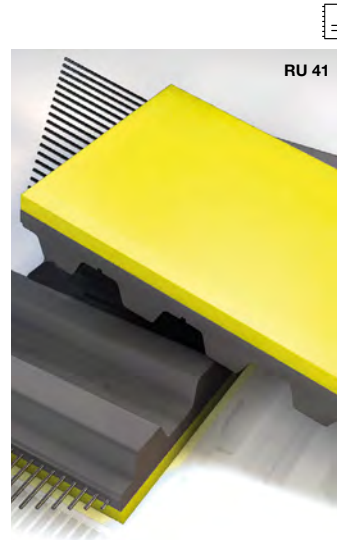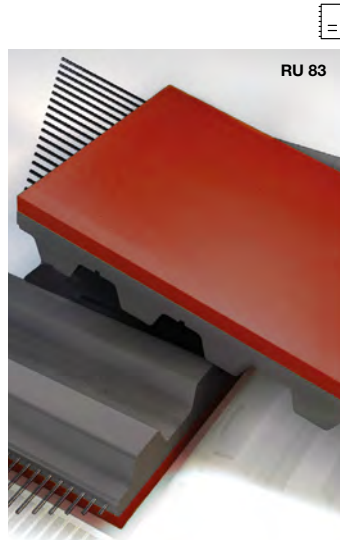

|                                     |                                                                                                                                                                                               |                                                                                                                                                                               |                                                                                         |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| SOURCE LOCATION                     | SPAIN                                                                                                                                                                                         | SPAIN                                                                                                                                                                         | SPAIN                                                                                   |
| COLOURS                             |                                                                                                            |                                                                                            |    |
| RAW MATERIAL                        | NATURAL RUBBER                                                                                                                                                                                | NATURAL RUBBER                                                                                                                                                                | NATURAL RUBBER                                                                          |
| HARDNESS (ShA)                      | 35-45                                                                                                                                                                                         | 35-45                                                                                                                                                                         | 40-50                                                                                   |
| COVER AND BELT COHESION METHOD      | TWO SHOT CURING                                                                                                                                                                               | ONE SHOT CURING                                                                                                                                                               | ONE SHOT CURING                                                                         |
| STANDARD COVER THICKNESS RANGE (mm) | 1.0 to 13                                                                                                                                                                                     | 1.6 to 12                                                                                                                                                                     | 1.0 to 13                                                                               |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                                                                                                                                       | +/- 0.3                                                                                                                                                                       | +/- 0.3                                                                                 |
| WORKING TEMPERATURE (°C)            | -25 /+80                                                                                                                                                                                      | -25 /+80                                                                                                                                                                      | -20 /+85                                                                                |
| COEFFICIENT OF FRICTION* (CoF)      | 0.70                                                                                                                                                                                          | 0.80                                                                                                                                                                          | 0.55                                                                                    |
| MIN. PULLEY DIAMETER                | Ø min. +TKx5(****)                                                                                                                                                                            | Ø min. +TKx5(****)                                                                                                                                                            | Ø min. +TKx5(****)                                                                      |
| WATER RESISTANCE                    | ●●●○                                                                                                                                                                                          | ●●●○                                                                                                                                                                          | ●●●○                                                                                    |
| ABRASION RESISTANCE                 | ●●●●                                                                                                                                                                                          | ●●●●                                                                                                                                                                          | ●●○○                                                                                    |
| OIL RESISTANCE**                    | ●○○○                                                                                                                                                                                          | ●○○○                                                                                                                                                                          | ●●●○                                                                                    |
| FEATURES/BENEFITS                   | Non marking compound for applications requiring, high coefficient of friction. Excellent abrasion resistance. Very good tear resistance. Low hysteresis. Only available on rubber base belts. | Cover offers high CoF, very good wear resistance. Compound common used in indexing, corrugating, positioning and packaging applications. Only available on rubber base belts. | Cover offering high-friction, non-marking feature. Only available on rubber base belts. |
| FOOD CONTACT APPROVED               | NO                                                                                                                                                                                            | NO                                                                                                                                                                            | NO                                                                                      |
| FDA APPROVED                        |                                                                                                                                                                                               |                                                                                                                                                                               |                                                                                         |
| EU REGULATIONS                      |                                                                                                                                                                                               |                                                                                                                                                                               |                                                                                         |

|            |                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                   |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUSTRIES |    |    |    |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

ENGINEERED & SPECIALTY BELTS





# COVERS: NATURAL RUBBER

## ORANGE NATURAL RUBBER R66

## POROL BLACK

## NBR

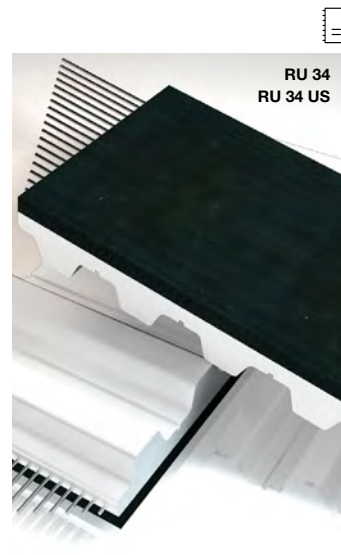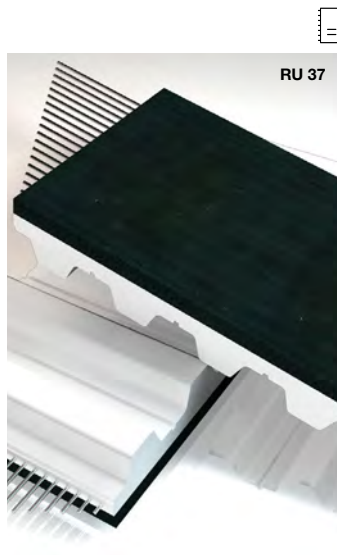

| SOURCE LOCATION                     | SPAIN                                                                                                                                                                          |  | ITALY, USA                                                                                                                         |  | ITALY, USA                                                                  | USA           |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------|---------------|
| COLOURS                             | ●                                                                                                                                                                              |  | ●                                                                                                                                  |  | ●                                                                           | ●             |
| RAW MATERIAL                        | NATURAL RUBBER                                                                                                                                                                 |  | NATURAL CELLULAR RUBBER FOAM                                                                                                       |  | NITRILE CAOUTCHOUC                                                          |               |
| HARDNESS (Sha)                      | 42-48                                                                                                                                                                          |  | 290 kg/m <sup>3</sup>                                                                                                              |  | 50                                                                          | 65 70         |
| COVER AND BELT COHESION METHOD      | TWO SHOT CURING                                                                                                                                                                |  | LAMINATION                                                                                                                         |  | LAMINATION                                                                  | VULCANIZATION |
| STANDARD COVER THICKNESS RANGE (mm) | 1.0 to 13                                                                                                                                                                      |  | 2 to 20                                                                                                                            |  | 2 to 6                                                                      |               |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                                                                                                                        |  | +/- 0.5                                                                                                                            |  | +/- 0.5                                                                     |               |
| WORKING TEMPERATURE (°C)            | -30 /+80                                                                                                                                                                       |  | -40 /+70                                                                                                                           |  | -35 /+70                                                                    |               |
| COEFFICIENT OF FRICTION* (CoF)      | 0.72                                                                                                                                                                           |  | 1.2                                                                                                                                |  | 0.70                                                                        |               |
| MIN. PULLEY DIAMETER                | Ø min. +TKx5(*****)                                                                                                                                                            |  | x 15                                                                                                                               |  | x 30                                                                        |               |
| WATER RESISTANCE                    | ●●●○                                                                                                                                                                           |  | ●●●●                                                                                                                               |  | ●●●●                                                                        |               |
| ABRASION RESISTANCE                 | ●●●○                                                                                                                                                                           |  | ●●○○                                                                                                                               |  | ●○○○                                                                        |               |
| OIL RESISTANCE**                    | ●○○○                                                                                                                                                                           |  | ●●○○                                                                                                                               |  | ●●●○                                                                        |               |
| FEATURES/BENEFITS                   | Cover is an alternative to DURATAQ™ offering a custom blended proprietary rubber which has a high CoF, and very good abrasion resistance. Only available on rubber base belts. |  | Cover is closed cell, soft elastic cellular rubber with good wear resistance. On request with Nylon cover for bottle descrambling. |  | Cover offers improved oil and grease resistance compared to natural rubber. |               |
| FOOD CONTACT APPROVED               | NO                                                                                                                                                                             |  | NO                                                                                                                                 |  | NO                                                                          |               |
| FDA APPROVED                        |                                                                                                                                                                                |  |                                                                                                                                    |  |                                                                             |               |
| EU REGULATIONS                      |                                                                                                                                                                                |  |                                                                                                                                    |  |                                                                             |               |

| INDUSTRIES |  |  |  |
|------------|--|--|--|
|------------|--|--|--|

ENGINEERED & SPECIALTY BELTS


Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.



# COVERS: NITRILE-NEOPRENE

## WHITE NITRILE

## GREEN NITRILE 55

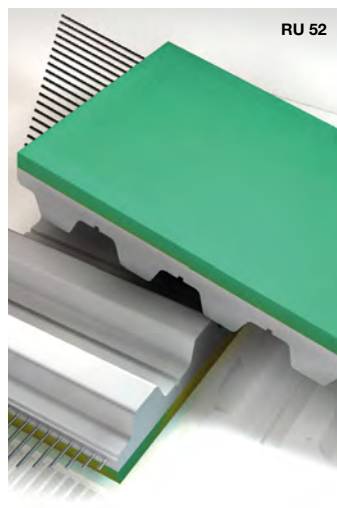

|                                     |                                                                                                                                                                        |                                                                                                 |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| SOURCE LOCATION                     | USA                                                                                                                                                                    | USA                                                                                             |
| COLOURS                             |                                                                                     |              |
| RAW MATERIAL                        | CARBOXILATED NITRILE                                                                                                                                                   | NITRILE                                                                                         |
| HARDNESS (ShA)                      | 40                                                                                                                                                                     | 55                                                                                              |
| COVER AND BELT COHESION METHOD      | VULCANIZATION                                                                                                                                                          | VULCANIZATION                                                                                   |
| STANDARD COVER THICKNESS RANGE (mm) | 2.4 to 14                                                                                                                                                              | 2.4 to 14                                                                                       |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                                                                                                                | +/- 0.3                                                                                         |
| WORKING TEMPERATURE (°C)            | -20 /+120                                                                                                                                                              | -20 /+120                                                                                       |
| COEFFICIENT OF FRICTION* (CoF)      | 0.70                                                                                                                                                                   | 0.70                                                                                            |
| MIN. PULLEY DIAMETER                | x 25                                                                                                                                                                   | x 30                                                                                            |
| WATER RESISTANCE                    | ●●●○                                                                                                                                                                   | ●●●○                                                                                            |
| ABRASION RESISTANCE                 | ●●●○                                                                                                                                                                   | ●●●●                                                                                            |
| OIL RESISTANCE**                    | ●●●●                                                                                                                                                                   | ●●●●                                                                                            |
| FEATURES/BENEFITS                   | Cover offering the benefit high-friction and good wear resistance. Very good oil resistance by moderate temperature up to +120° C offers a wide range of applications. | Cover offering high CoF and moderate abrasion / water / oil resistance in ambient temperatures. |
| FOOD CONTACT APPROVED               | YES                                                                                                                                                                    | NO                                                                                              |
| FDA APPROVED                        | YES                                                                                                                                                                    |                                                                                                 |
| EU REGULATIONS                      | YES                                                                                                                                                                    |                                                                                                 |

|            |                                                                                                                                                                          |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUSTRIES |   |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

ENGINEERED &  
SPECIALTY BELTS



# COVERS: NITRILE-NEOPRENE

## BLACK NEOPRENE

## TAN NEOPRENE 55



|                                     |                                                                                           |               |                                                 |
|-------------------------------------|-------------------------------------------------------------------------------------------|---------------|-------------------------------------------------|
| SOURCE LOCATION                     | ITALY, USA                                                                                |               | USA                                             |
| COLOURS                             | ●                                                                                         |               | ●                                               |
| RAW MATERIAL                        | NEOPRENE                                                                                  |               | NEOPRENE                                        |
| HARDNESS (ShA)                      | 50                                                                                        | 70            | 55                                              |
| COVER AND BELT COHESION METHOD      | LAMINATION                                                                                | VULCANIZATION | VULCANIZATION                                   |
| STANDARD COVER THICKNESS RANGE (mm) | 3 to 12                                                                                   | 0.8 to 15     | 2.4 to 14                                       |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                                   |               | +/- 0.3                                         |
| WORKING TEMPERATURE (°C)            | -20 /+60                                                                                  | -10 /+100     | -20 /+120                                       |
| COEFFICIENT OF FRICTION* (CoF)      | 0.60                                                                                      |               | 1.60                                            |
| MIN. PULLEY DIAMETER                | x 30                                                                                      |               | x 30                                            |
| WATER RESISTANCE                    | ●●●○                                                                                      |               | ●●●○                                            |
| ABRASION RESISTANCE                 | ●●●○                                                                                      |               | ●●●○                                            |
| OIL RESISTANCE**                    | ●●●○                                                                                      |               | ●●●○                                            |
| FEATURES/BENEFITS                   | Cover offers high CoF and moderate abrasion/water/oil resistance in ambient temperatures. |               | Cover offers high CoF and good wear resistance. |
| FOOD CONTACT APPROVED               | NO                                                                                        |               | YES                                             |
| FDA APPROVED                        |                                                                                           |               | YES                                             |
| EU REGULATIONS                      |                                                                                           |               |                                                 |

|            |                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                             |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUSTRIES |    |    |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

ENGINEERED &  
SPECIALTY BELTS

Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.




# COVERS: POLYCHLOROPRENE

## BLUE FDA NEOPRENE 65

## YELLOW NEOPRENE R15

## HIGH DURO NEOPRENE R18

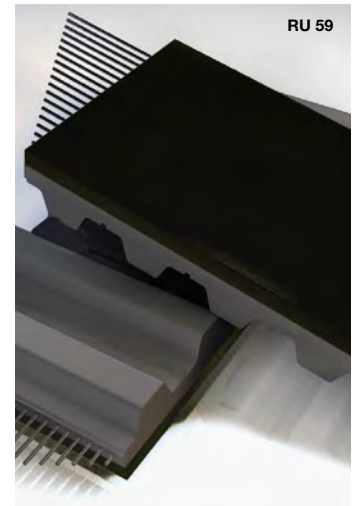

|                                     |                                                                                                                                                                                            |                                                                                                                                                         |                                                                                                      |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| SOURCE LOCATION                     | SPAIN                                                                                                                                                                                      | SPAIN                                                                                                                                                   | SPAIN                                                                                                |
| COLOURS                             |                                                                                                         |                                                                      |                 |
| RAW MATERIAL                        | POLYCHLOROPRENE                                                                                                                                                                            | POLYCHLOROPRENE                                                                                                                                         | POLYCHLOROPRENE                                                                                      |
| HARDNESS (ShA)                      | 63-73                                                                                                                                                                                      | 35-45                                                                                                                                                   | 70-80                                                                                                |
| COVER AND BELT COHESION METHOD      | ONE SHOT CURING                                                                                                                                                                            | ONE SHOT CURING                                                                                                                                         | ONE SHOT CURING                                                                                      |
| STANDARD COVER THICKNESS RANGE (mm) | 1.6 to 12                                                                                                                                                                                  | 1.0 to 13                                                                                                                                               | 1.0 to 13                                                                                            |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                                                                                                                                    | +/- 0.3                                                                                                                                                 | +/- 0.3                                                                                              |
| WORKING TEMPERATURE (°C)            | -35 /+105                                                                                                                                                                                  | -25 /+80                                                                                                                                                | -20 /+80                                                                                             |
| COEFFICIENT OF FRICTION* (CoF)      | 0.80                                                                                                                                                                                       | 0.65                                                                                                                                                    | 0.60                                                                                                 |
| MIN. PULLEY DIAMETER                | Ø min. +TKx5(****)                                                                                                                                                                         | Ø min. +TKx5(****)                                                                                                                                      | Ø min. +TKx5(****)                                                                                   |
| WATER RESISTANCE                    | ●●●○                                                                                                                                                                                       | ●●●○                                                                                                                                                    | ●●●○                                                                                                 |
| ABRASION RESISTANCE                 | ●●●●                                                                                                                                                                                       | ●●●○                                                                                                                                                    | ●●●○                                                                                                 |
| OIL RESISTANCE**                    | ●●●○                                                                                                                                                                                       | ●●●○                                                                                                                                                    | ●●●○                                                                                                 |
| FEATURES/BENEFITS                   | Cover offers good resistance to weather and ozone environments. Self extinguishing. Good resistance to acid solutions. Formulated with FDA materials. Only available on rubber base belts. | Cover offers a Neoprene alternative for applications requiring better resistance to heat, oils, greases, solvents. Only available on rubber base belts. | Cover offering a high ShA, black non-marking neoprene compound. Only available on rubber base belts. |
| FOOD CONTACT APPROVED               | YES                                                                                                                                                                                        | NO                                                                                                                                                      | NO                                                                                                   |
| FDA APPROVED                        | YES                                                                                                                                                                                        |                                                                                                                                                         |                                                                                                      |
| EU REGULATIONS                      |                                                                                                                                                                                            |                                                                                                                                                         |                                                                                                      |

### INDUSTRIES



ENGINEERED &  
SPECIALTY BELTS



# COVERS: POLYCHLOROPRENE

## 50 DURO GRAY NEOPRENE R23

## 65 DURO GRAY NEOPRENE R24

## HIGH DURO PINK NEOPRENE R25



|                                     |                                                                                                                                                    |                                                                                                                      |                                                                                                                         |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| SOURCE LOCATION                     | SPAIN                                                                                                                                              | SPAIN                                                                                                                | SPAIN                                                                                                                   |
| COLOURS                             |                                                                 |                                   |                                    |
| RAW MATERIAL                        | POLYCHLOROPRENE                                                                                                                                    | POLYCHLOROPRENE                                                                                                      | POLYCHLOROPRENE                                                                                                         |
| HARDNESS (ShA)                      | 50-60                                                                                                                                              | 60-70                                                                                                                | 65-75                                                                                                                   |
| COVER AND BELT COHESION METHOD      | ONE SHOT CURING                                                                                                                                    | ONE SHOT CURING                                                                                                      | ONE SHOT CURING                                                                                                         |
| STANDARD COVER THICKNESS RANGE (mm) | 1.0 to 13                                                                                                                                          | 1.0 to 13                                                                                                            | 1.0 to 13                                                                                                               |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                                                                                            | +/- 0.3                                                                                                              | +/- 0.3                                                                                                                 |
| WORKING TEMPERATURE (°C)            | -25 /+80                                                                                                                                           | -25 /+80                                                                                                             | -20 /+90                                                                                                                |
| COEFFICIENT OF FRICTION* (CoF)      | 0.65                                                                                                                                               | 0.65                                                                                                                 | 0.60                                                                                                                    |
| MIN. PULLEY DIAMETER                | Ø min. +TKx5(****)                                                                                                                                 | Ø min. +TKx5(****)                                                                                                   | Ø min. +TKx5(****)                                                                                                      |
| WATER RESISTANCE                    | ●●●○                                                                                                                                               | ●●●○                                                                                                                 | ●●●○                                                                                                                    |
| ABRASION RESISTANCE                 | ●●●○                                                                                                                                               | ●●●○                                                                                                                 | ●●●○                                                                                                                    |
| OIL RESISTANCE**                    | ●●●○                                                                                                                                               | ●●●○                                                                                                                 | ●●●○                                                                                                                    |
| FEATURES/BENEFITS                   | Cover offering a medium ShA, non-marking compound, good heat resistance, CoF properties and colour stability. Only available on rubber base belts. | Cover offering medium ShA, non-marking compound. Formulated with FDA materials. Only available on rubber base belts. | Cover offering non-marking compound. Good friction properties and heat-resistance. Only available on rubber base belts. |
| FOOD CONTACT APPROVED               | NO                                                                                                                                                 | YES                                                                                                                  | NO                                                                                                                      |
| FDA APPROVED                        |                                                                                                                                                    | YES                                                                                                                  |                                                                                                                         |
| EU REGULATIONS                      |                                                                                                                                                    |                                                                                                                      |                                                                                                                         |

|            |                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                         |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUSTRIES |    |     |     |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

ENGINEERED & SPECIALTY BELTS


Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.



# COVERS: POLYCHLOROPRENE

## STATIC DISSIPATING NEOPRENE ISEPO

## LOW DURO WHITE NEOPRENE R92

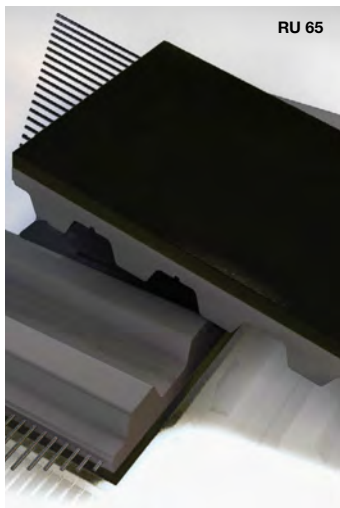

RU 65



RU 66

|                                        |                                                                                                                                                                             |                                                                                                                                                          |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| SOURCE LOCATION                        | SPAIN                                                                                                                                                                       | SPAIN                                                                                                                                                    |
| COLOURS                                | ●                                                                                                                                                                           | ●                                                                                                                                                        |
| RAW MATERIAL                           | POLYCHLOROPRENE                                                                                                                                                             | POLYCHLOROPRENE                                                                                                                                          |
| HARDNESS (ShA)                         | 67-77                                                                                                                                                                       | 35-45                                                                                                                                                    |
| COVER AND BELT<br>COHESION METHOD      | ONE SHOT CURING                                                                                                                                                             | ONE SHOT CURING                                                                                                                                          |
| STANDARD COVER<br>THICKNESS RANGE (mm) | 1.0 to 13                                                                                                                                                                   | 1.0 to 10                                                                                                                                                |
| TOLERANCE COVER<br>THICKNESS (mm)      | +/- 0.3                                                                                                                                                                     | +/- 0.3                                                                                                                                                  |
| WORKING TEMPERATURE<br>(°C)            | -20 /+80                                                                                                                                                                    | -20 /+90                                                                                                                                                 |
| COEFFICIENT OF<br>FRICTION* (CoF)      | 0.60                                                                                                                                                                        | 0.65                                                                                                                                                     |
| MIN. PULLEY DIAMETER                   | Ø min. +TKx5(****)                                                                                                                                                          | Ø min. +TKx5(****)                                                                                                                                       |
| WATER RESISTANCE                       | ●●●○                                                                                                                                                                        | ●●●○                                                                                                                                                     |
| ABRASION RESISTANCE                    | ●●●○                                                                                                                                                                        | ●●●○                                                                                                                                                     |
| OIL RESISTANCE**                       | ●●●○                                                                                                                                                                        | ●●●○                                                                                                                                                     |
| FEATURES/BENEFITS                      | Cover used on belts requiring high conductivity. Compound exceed the ISO/ RMA classification for antistatic, static dissipating belts. Only available on rubber base belts. | Cover offers low ShA non-marking compound, offers high CoF and good wear resistance. Formulated with FDA materials. Only available on rubber base belts. |
| FOOD CONTACT APPROVED                  | NO                                                                                                                                                                          | YES                                                                                                                                                      |
| FDA APPROVED                           |                                                                                                                                                                             | YES                                                                                                                                                      |
| EU REGULATIONS                         |                                                                                                                                                                             |                                                                                                                                                          |

### INDUSTRIES



ENGINEERED &  
SPECIALTY BELTS





## COVERS: EPDM-VITON-HNBR

### EPDM

### VITON™ (KFM)

### HTX (SILBLUE)

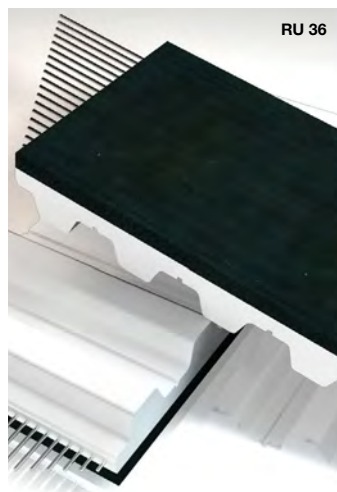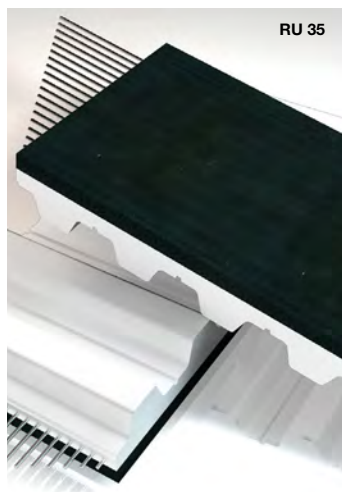

| SOURCE LOCATION                     | ITALY                                                                               | ITALY                                                                                                                                                                                        | SPAIN                                                                                                                                            |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| COLOURS                             | ●                                                                                   | ●                                                                                                                                                                                            | ●                                                                                                                                                |
| RAW MATERIAL                        | ETHYLENE-PROPYLENE-DIENE-MONOMER                                                    | FLUOROPOLYMER                                                                                                                                                                                | SILICONE                                                                                                                                         |
| HARDNESS (ShA)                      | 70                                                                                  | 75                                                                                                                                                                                           | 64                                                                                                                                               |
| COVER AND BELT COHESION METHOD      | LAMINATION                                                                          | LAMINATION                                                                                                                                                                                   | ONE SHOT CURING                                                                                                                                  |
| STANDARD COVER THICKNESS RANGE (mm) | 2 to 5                                                                              | 2 to 4                                                                                                                                                                                       | <= 12(*)                                                                                                                                         |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.5                                                                             | +/- 0.5                                                                                                                                                                                      | +/- 0.3                                                                                                                                          |
| WORKING TEMPERATURE (°C)            | -20 /+120                                                                           | -10/+250                                                                                                                                                                                     | 0 /+175                                                                                                                                          |
| COEFFICIENT OF FRICTION* (CoF)      | 1.10                                                                                | 0.70                                                                                                                                                                                         | 1.60                                                                                                                                             |
| MIN. PULLEY DIAMETER                | x 35                                                                                | x 40                                                                                                                                                                                         | Ø min. +TKx5(****)                                                                                                                               |
| WATER RESISTANCE                    | ●●●●                                                                                | ●●●●                                                                                                                                                                                         | ●●●●                                                                                                                                             |
| ABRASION RESISTANCE                 | ●○○○                                                                                | ●●●○                                                                                                                                                                                         | ●●○○                                                                                                                                             |
| OIL RESISTANCE**                    | ●○○○                                                                                | ●●●●                                                                                                                                                                                         | ●●●○                                                                                                                                             |
| FEATURES/BENEFITS                   | Cover offers high-temperature range, good chemical and aging resistance.            | Cover offers extremely high-temperature and oil resistance.<br><b>ATTENTION:</b> For Lamination, attention must be given to the lower temperature resistance of base belt and adhesive used. | Cover offers high-temperature and UV resistance. Non-marking compound common used in printing applications. Only available on rubber base belts. |
| FOOD CONTACT APPROVED               | NO                                                                                  | NO                                                                                                                                                                                           | NO                                                                                                                                               |
| FDA APPROVED                        |                                                                                     |                                                                                                                                                                                              |                                                                                                                                                  |
| EU REGULATIONS                      |                                                                                     |                                                                                                                                                                                              |                                                                                                                                                  |
| INDUSTRIES                          |  |                                                                                                          |                                                             |

ENGINEERED &  
SPECIALTY BELTS

Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.




## COVERS: EPDM-VITON-HNBR

### 70 DURO GREY HNBR - HTG

### LEV-HT-4 (LEVAPREN®)

### SPONGE RUBBER ORANGE

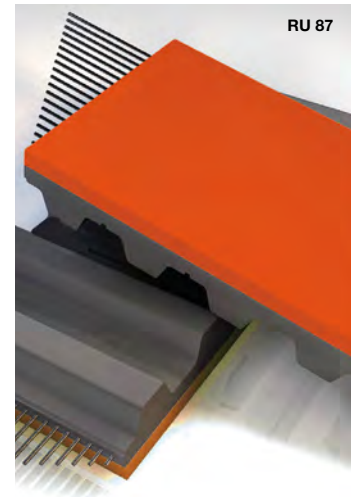

|                                     |                                                                                                                                                                  |                                                                                        |                                               |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-----------------------------------------------|
| SOURCE LOCATION                     | SPAIN                                                                                                                                                            | SPAIN                                                                                  | ITALY                                         |
| COLOURS                             |                                                                                                                                                                  |                                                                                        |                                               |
| RAW MATERIAL                        | HNBR                                                                                                                                                             | EVA                                                                                    | NATURAL RUBBER                                |
| HARDNESS (ShA)                      | 66-76                                                                                                                                                            | 69-77                                                                                  | 250 kg/m³                                     |
| COVER AND BELT COHESION METHOD      | ONE SHOT CURING                                                                                                                                                  | ONE SHOT CURING                                                                        | LAMINATION                                    |
| STANDARD COVER THICKNESS RANGE (mm) | 1/10                                                                                                                                                             | 1.0 - 10.0                                                                             | 15 - 30                                       |
| TOLERANCE COVER THICKNESS (mm)      | +/- 0.3                                                                                                                                                          | +/- 0.3                                                                                | +/- 0.5                                       |
| WORKING TEMPERATURE (°C)            | -30 /+150                                                                                                                                                        | -20 /+150                                                                              | -40 /+60                                      |
| COEFFICIENT OF FRICTION* (CoF)      | 0.55                                                                                                                                                             | 0.62                                                                                   | ON REQUEST                                    |
| MIN. PULLEY DIAMETER                | Ø min. +TKx5(****)                                                                                                                                               | Ø min. +TKx5(****)                                                                     | ON REQUEST                                    |
| WATER RESISTANCE                    | ●●●○                                                                                                                                                             | ●●●○                                                                                   | ●●○○                                          |
| ABRASION RESISTANCE                 | ●●●○                                                                                                                                                             | ●●●○                                                                                   | ●○○○                                          |
| OIL RESISTANCE**                    | ●●●●                                                                                                                                                             | ●●●●                                                                                   | ●●○○                                          |
| FEATURES/BENEFITS                   | Cover offers higher temperature applications where UV resistance is needed. Only available for 8M, H and T10 belt profiles. Only available on rubber base belts. | Cover offers higher temperature applications than HNBR and even better oil resistance. | Hi grip rubber sponge for sensitive products. |
| FOOD CONTACT APPROVED               | NO                                                                                                                                                               | YES                                                                                    | NO                                            |
| FDA APPROVED                        |                                                                                                                                                                  |                                                                                        |                                               |
| EU REGULATIONS                      |                                                                                                                                                                  |                                                                                        |                                               |

#### INDUSTRIES




ENGINEERED &  
SPECIALTY BELTS

# COVERS: OTHER

## NFB/NFT

## TT60

## CHROME LEATHER

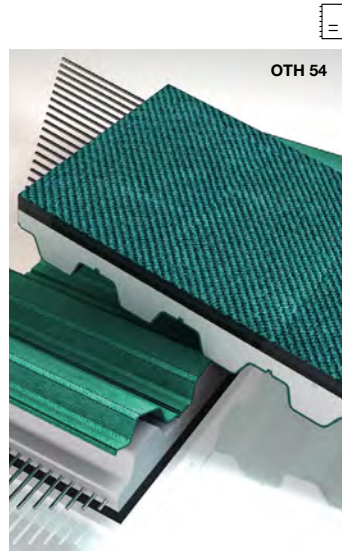

| SOURCE LOCATION                     | ITALY, USA                                                                                                                                                                                                                                           | ITALY                                                                                                                                                                                               | ITALY, USA                                                                                                                       |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| COLOURS                             | <span style="color: green;">●</span> <span style="color: black;">●</span> (antistatic)                                                                                                                                                               | <span style="color: brown;">●</span> <span style="color: black;">●</span>                                                                                                                           | <span style="color: grey;">●</span>                                                                                              |
| RAW MATERIAL                        | NYLON FABRIC                                                                                                                                                                                                                                         | FELT                                                                                                                                                                                                | LEATHER                                                                                                                          |
| HARDNESS (ShA)                      | —                                                                                                                                                                                                                                                    | 55                                                                                                                                                                                                  | 65                                                                                                                               |
| COVER AND BELT COHESION METHOD      | CO-EXTRUSION - LAMINATION                                                                                                                                                                                                                            | LAMINATION                                                                                                                                                                                          | LAMINATION                                                                                                                       |
| STANDARD COVER THICKNESS RANGE (mm) | 0.15 - 0.6                                                                                                                                                                                                                                           | 2                                                                                                                                                                                                   | 2 to 3                                                                                                                           |
| TOLERANCE COVER THICKNESS (mm)      | —                                                                                                                                                                                                                                                    | +/- 1.0                                                                                                                                                                                             | +/- 0.5                                                                                                                          |
| WORKING TEMPERATURE (°C)            | -20 /+80                                                                                                                                                                                                                                             | -10 /+120                                                                                                                                                                                           | 0 /+60                                                                                                                           |
| COEFFICIENT OF FRICTION* (CoF)      | 0.25                                                                                                                                                                                                                                                 | 0.40                                                                                                                                                                                                | 0.40                                                                                                                             |
| MIN. PULLEY DIAMETER                | According to the belt FEATURES                                                                                                                                                                                                                       | 120 mm                                                                                                                                                                                              | x 50                                                                                                                             |
| WATER RESISTANCE                    | ●●●○                                                                                                                                                                                                                                                 | ●○○○                                                                                                                                                                                                | ●●●○                                                                                                                             |
| ABRASION RESISTANCE                 | ●●○○                                                                                                                                                                                                                                                 | ●●●●                                                                                                                                                                                                | ●●●○                                                                                                                             |
| OIL RESISTANCE**                    | ●●○○                                                                                                                                                                                                                                                 | ●●○○                                                                                                                                                                                                | ●●●○                                                                                                                             |
| FEATURES/BENEFITS                   | NFT/NFB offers low friction for accumulation as well as low-noise benefits and is usually applied Co-extrusion on base belts. In this case the min. pulley diameters indicated for each belt type and pitch are valid. Antistatic version available. | Antistatic cover provides a soft, non-marking, and good oil resistance surface for moving sharp, oily surface parts. Works well downline in complement to Kevlar® for higher temperature conveying. | Cover has a roughened surface that offers very good oil / grease resistance and good cut resistance for moving sharp oily parts. |
| FOOD CONTACT APPROVED               | NO                                                                                                                                                                                                                                                   | NO                                                                                                                                                                                                  | NO                                                                                                                               |
| FDA APPROVED                        |                                                                                                                                                                                                                                                      |                                                                                                                                                                                                     |                                                                                                                                  |
| EU REGULATIONS                      |                                                                                                                                                                                                                                                      |                                                                                                                                                                                                     |                                                                                                                                  |

### INDUSTRIES



## ENGINEERED & SPECIALTY BELTS

Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.



# COVERS: OTHER

## KEVLAR® FELT

## FAG 25 GREEN FELT



|                                     |                                                                                        |                                                                                                                                                                                             |
|-------------------------------------|----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SOURCE LOCATION                     | ITALY, USA                                                                             | ITALY                                                                                                                                                                                       |
| COLOURS                             |     |                                                                                                          |
| RAW MATERIAL                        | ARAMID                                                                                 | POLYESTERFELT                                                                                                                                                                               |
| HARDNESS (ShA)                      | —                                                                                      | 70                                                                                                                                                                                          |
| COVER AND BELT COHESION METHOD      | LAMINATION                                                                             | LAMINATION                                                                                                                                                                                  |
| STANDARD COVER THICKNESS RANGE (mm) | 6/8                                                                                    | 5                                                                                                                                                                                           |
| TOLERANCE COVER THICKNESS (mm)      | +/- 1.0                                                                                | +/- 1                                                                                                                                                                                       |
| WORKING TEMPERATURE (°C)            | -20 /+450                                                                              | -20 /+120                                                                                                                                                                                   |
| COEFFICIENT OF FRICTION* (CoF)      | Values upon request                                                                    | VALUE ON REQUEST                                                                                                                                                                            |
| MIN. PULLEY DIAMETER                | —                                                                                      | 120 MM                                                                                                                                                                                      |
| WATER RESISTANCE                    | ●○○○                                                                                   | ●○○○                                                                                                                                                                                        |
| ABRASION RESISTANCE                 | ●●●○                                                                                   | ●●●●                                                                                                                                                                                        |
| OIL RESISTANCE**                    | ●○○○                                                                                   | ●●○○                                                                                                                                                                                        |
| FEATURES/BENEFITS                   | Excellent heat-resistance for high temperature applications such as aluminum extrusion | The felt provides a soft, non-marking, and good oil resistance surface for moving sharp, oily surface parts. Works well downline in complement to Kevlar® for higher temperature conveying. |
| FOOD CONTACT APPROVED               | NO                                                                                     | NO                                                                                                                                                                                          |
| FDA APPROVED                        |                                                                                        |                                                                                                                                                                                             |
| EU REGULATIONS                      |                                                                                        |                                                                                                                                                                                             |

## INDUSTRIES




ENGINEERED & SPECIALTY BELTS



# MEGASILCOAT

## SILICONE RANGE

SILICONE COATED FABRIC WITH HOLES AND SLOTS

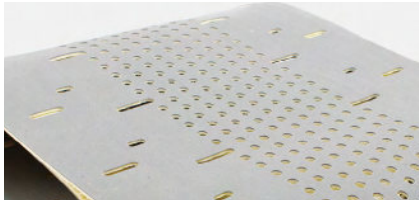

SILICONE COATED FOAM ON MEGAPOWER SUBSTRATE



SILICONE COATED TIMING BELT



Megadyne has developed state of the art processes for applying silicone to synchronous and non-synchronous belts and fabrics. Ongoing investments in automation with a strategic focus on process controls and high-quality repeatability have been made. Through continuous material feed, increased speeds, line efficiency, and operator engagement with screen panel controls, we are able to maintain extremely tight manufacturing tolerances and high-quality standards.

Coated belts are commonly used in product handling applications where environmental or special handling features are needed. Additionally, a thin coating on certain substrates allow for the finished product to offer good flexibility, enabling the belt to be used on low profile conveyors where designs such as knife-edge pulleys are common.

FDA Silicone allows the use of our product in applications such as hygienic goods and medical related parts and components. Silicone is an excellent cover material where the use of glues and adhesives are present in product manufacturing and require easy release and clean up. Silicone also has excellent heat-resistance, making it an ideal solution for applications in high heat environments.

Silicone cover can be applied on different substrates, as a rubber timing belts, moulded or open-ended polyurethane timing belts, truly endless flex TPU belts, rubber and polyurethane Multi-rib V-Belts, rubber banded V-Belts, rubber Flat Belts. Silicone coated products can be further customised with modifications such as holes and slots to meet application needs such as vacuum draw.

|                                            | MEGASILCOAT<br>TRANSPARENT                                                                                                                                                                                                                                                                                                                        | MEGASILCOAT<br>BLUE 24 | MEGASILCOAT<br>CRYSTAL 25 | MEGASILCOAT<br>RED HT 30                       | MEGASILCOAT<br>35 | MEGASILCOAT<br>WR 43 |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------------------------|------------------------------------------------|-------------------|----------------------|
| <b>SOURCE LOCATION</b>                     | ITALY                                                                                                                                                                                                                                                                                                                                             | ITALY                  | ITALY                     | ITALY                                          | ITALY - USA       | ITALY                |
| <b>COLOUR</b>                              | ○                                                                                                                                                                                                                                                                                                                                                 | ●                      | ○                         | ●                                              | ● ● ● ● ● ●       | ● ●                  |
| <b>RAW MATERIAL</b>                        | SILICONE                                                                                                                                                                                                                                                                                                                                          | SILICONE               | SILICONE                  | SILICONE                                       | SILICONE          | SILICONE             |
| <b>HARDNESS (ShA)</b>                      | 20                                                                                                                                                                                                                                                                                                                                                | 24                     | 25                        | 30                                             | 35                | 43                   |
| <b>COVER AND BELT COHESION METHOD</b>      | knife coating                                                                                                                                                                                                                                                                                                                                     | knife coating          | knife coating             | knife coating                                  | knife coating     | knife coating        |
| <b>STANDARD COVER THICKNESS RANGE (mm)</b> | 1 to 10                                                                                                                                                                                                                                                                                                                                           | 1 to 10                | 1 to 10                   | 1 to 10                                        | 1 to 10           | 1 to 10              |
| <b>TOLERANCE COVER THICKNESS (mm)</b>      | +/- 0.3                                                                                                                                                                                                                                                                                                                                           | +/- 0.3                | +/- 0.3                   | +/- 0.3                                        | +/- 0.3           | +/- 0.3              |
| <b>WORKING TEMPERATURE (°C)</b>            | -40 /+180                                                                                                                                                                                                                                                                                                                                         | -40 /+180              | -60 /+180                 | -60 /+180<br>up to +300 for short time period* | -60 /+180         | -60 /+180            |
| <b>MIN. PULLEY DIAMETER</b>                | x 20                                                                                                                                                                                                                                                                                                                                              | x 20                   | x 20                      | x 20                                           | x 20              | x 20                 |
| <b>WATER RESISTANCE</b>                    | ● ● ● ○                                                                                                                                                                                                                                                                                                                                           | ● ● ● ○                | ● ● ● ○                   | ● ● ● ○                                        | ● ● ● ○           | ● ● ● ○              |
| <b>ABRASION RESISTANCE</b>                 | ● ○ ○ ○                                                                                                                                                                                                                                                                                                                                           | ● ○ ○ ○                | ● ○ ○ ○                   | ● ● ○ ○                                        | ● ○ ○ ○           | ● ● ○ ○              |
| <b>OIL RESISTANCE**</b>                    | ● ● ○ ○                                                                                                                                                                                                                                                                                                                                           | ● ● ○ ○                | ● ● ○ ○                   | ● ● ● ○                                        | ● ● ● ○           | ● ● ● ○              |
| <b>FEATURES/BENEFITS</b>                   | Cover offers high-temperature resistance, excellent grip and ease of product release, making clean-up of materials like adhesives easy.                                                                                                                                                                                                           |                        |                           |                                                |                   |                      |
| <b>FC APPROVED</b>                         | no                                                                                                                                                                                                                                                                                                                                                | yes                    | yes                       | no                                             | yes               | yes                  |
| <b>FDA APPROVED</b>                        | no                                                                                                                                                                                                                                                                                                                                                | yes                    | yes                       | no                                             | yes               | yes                  |
| <b>EU REGULATIONS</b>                      | no                                                                                                                                                                                                                                                                                                                                                | no                     | no                        | no                                             | no                | no                   |
| <b>INDUSTRIES</b>                          |     |                        |                           |                                                |                   |                      |

ENGINEERED &  
SPECIALTY BELTS

Please contact Megadyne or your local partner distributor to obtain more information about our materials, processes, minimum quantities and delivery times.



# PRODUCT EXAMPLE GALLERY



ENGINEERED &  
SPECIALTY BELTS



# COVERS: BELT WORKSHEET

Choosing the right belt cover for a new application, requires a thorough understanding of the belt requirement and the environment in which the belt will operate. Reviewing the questions below will help guide you through the process.  
If desired, please copy this page, scan and send to your sales contact.

|                                                                                                                        |                                            |                                                  |                                             |
|------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------------------------------|---------------------------------------------|
| <b>Belt Finish</b>                                                                                                     |                                            |                                                  |                                             |
| Width:                                                                                                                 | Pitch:                                     | Lenght:                                          | Quantity:                                   |
| Belt Type                                                                                                              |                                            |                                                  |                                             |
| <input type="checkbox"/> ML Joined Endless                                                                             | <input type="checkbox"/> PPJ - Pin Joint   | <input type="checkbox"/> ML Open-Ended           | <input type="checkbox"/> ML Belt Clamp Used |
| <input type="checkbox"/> MFX Flex Type                                                                                 | <input type="checkbox"/> MP Molded Endless | <input type="checkbox"/> Neoprene Endless Molded |                                             |
| <input type="checkbox"/> Others                                                                                        |                                            |                                                  |                                             |
| <b>Application</b>                                                                                                     |                                            |                                                  |                                             |
| Is the product to be moved on a horizontal, vertical or inclined plane?                                                |                                            |                                                  |                                             |
| <input type="checkbox"/> Conveyor                                                                                      | <input type="checkbox"/> VFFS or FFS       | <input type="checkbox"/> Cable Puller            | <input type="checkbox"/> Capping            |
| <input type="checkbox"/> Vacuum                                                                                        | <input type="checkbox"/> Polishing         | <input type="checkbox"/> Food                    |                                             |
| <input type="checkbox"/> Others                                                                                        |                                            |                                                  |                                             |
| Conveyor speed:                                                                                                        | m/s                                        | Max. acceleration/deceleration                   | m/s <sup>2</sup>                            |
| Material to be conveyed:                                                                                               |                                            |                                                  |                                             |
| Weight of load on the belt: kg                                                                                         |                                            |                                                  |                                             |
| Material of belt Guidance/friction partner:                                                                            |                                            |                                                  |                                             |
| Does the belt run in                                                                                                   |                                            |                                                  |                                             |
| <input type="checkbox"/> one direction only                                                                            | <input type="checkbox"/> bi-directionally? |                                                  |                                             |
| Number of Pulleys:                                                                                                     | Diameter of Pulleys:                       | Counter flexion Diameter:                        |                                             |
| Material of Pulleys:                                                                                                   | Omega drive: yes/no                        |                                                  |                                             |
| What best describes the cover need?                                                                                    |                                            |                                                  |                                             |
| <input type="checkbox"/> High friction                                                                                 | <input type="checkbox"/> Low friction      | <input type="checkbox"/> Easy of release         | <input type="checkbox"/> Shock Absorption   |
| <input type="checkbox"/> Compressibility                                                                               | <input type="checkbox"/> Others            |                                                  |                                             |
| Does the cover require a specific thickness?                                                                           |                                            |                                                  |                                             |
| Does the cover have a min/max thickness tolerance?                                                                     |                                            |                                                  |                                             |
| Does the belt have contact with water?                                                                                 |                                            |                                                  |                                             |
| If yes                                                                                                                 | <input type="checkbox"/> Bath              | <input type="checkbox"/> Humidity                |                                             |
| Does the belt have contact with salts, lactic acids, oils, UV radiation or Abrasive materials like sand/dust/crystals? |                                            |                                                  |                                             |
| If yes please add kind of contacts and/or material:                                                                    |                                            |                                                  |                                             |



☐ -20 / +80 °C      ☐ <-20°C please add \_\_\_\_\_°C      ☐ >80°C please add \_\_\_\_\_°C  
In case only the conveyed material has a higher contact temperature \_\_\_\_\_°C

- ☐ Antistatic
- ☐ FDA (FDA 21 CFR 177.2600, FDA21 CFR 177.105, FDA21 CFR 177.1680)
- ☐ European Directives 82/711/EEC,85/572/EEC,93/8/EEC e 97/48/EEC  
Regulation (EC) n° 1935/2004 (art.3,art.11,par.5,art.15,art.17) e 1895/2005 (where applicable)  
Regulation (EU) n° 10/2011
- ☐ USDA (NSF/ANSI/3-A 14159-3-2010 Hygiene Requirements for the Design of Mechanical Belt  
Conveyors used in Meat and Poultry Processing)

| Modification                                                      | Purpose                                                |
|-------------------------------------------------------------------|--------------------------------------------------------|
| 1. Add a new column 'Status' to the 'Users' table.                | To track the status of users (e.g., active, inactive). |
| 2. Update the 'Email' column in the 'Users' table to be nullable. | To allow for users who may not have an email address.  |
| 3. Add a new index on the 'Email' column in the 'Users' table.    | To improve search performance for email addresses.     |
| 4. Add a new column 'LastLogin' to the 'Users' table.             | To track the last time a user logged in.               |
| 5. Add a new column 'Password' to the 'Users' table.              | To store user passwords securely.                      |
| 6. Add a new column 'Role' to the 'Users' table.                  | To define user roles (e.g., admin, user).              |
| 7. Add a new column 'CreatedAt' to the 'Users' table.             | To track when a user was created.                      |
| 8. Add a new column 'UpdatedAt' to the 'Users' table.             | To track when a user's information was last updated.   |
| 9. Add a new column 'IsVerified' to the 'Users' table.            | To track if a user's email has been verified.          |
| 10. Add a new column 'IsDeleted' to the 'Users' table.            | To track if a user has been deleted.                   |

☐ Vacuum      ☐ Drainage      ☐ Sortation      ☐ Tight Tolerance      ☐ Others

What modifications are required?

☐ Grinding
 ☐ Routing/Profile Grinding
 ☐ Hole punching
 ☐ Grooving
 ☐ Others

If grinding, requested finish and thickness

If precision grinding, requested tolerances

If routing, please sketch the desired design. Include dimensions:

If hole punching, what is the hole diameter and hole pattern requested Please sketch. Indicate tolerances if required:

If grooving, indicate by sketch the design or pattern requested:

A full-page view of a blank sheet of white graph paper. The grid consists of thin, light gray horizontal and vertical lines forming small squares. There are 20 columns and 15 rows of squares visible on the page.



# MODIFICATIONS


CUSTOM COVER MODIFICATIONS

CLEATS

MEGAC4T

FALSE TEETH

PROGRESSIVE PIN JOINT (PPJ)

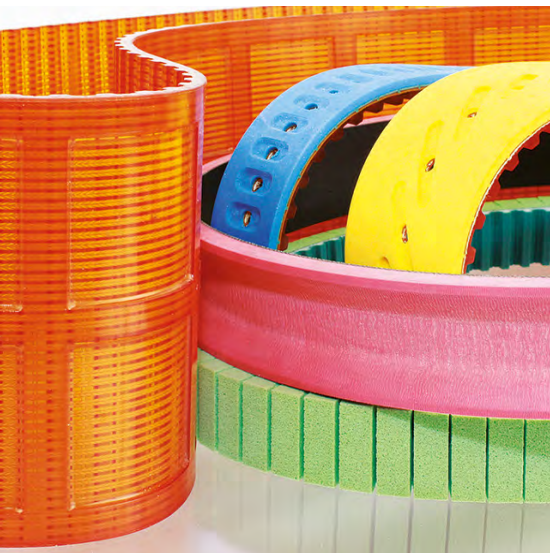

# MODIFICATIONS



## CUSTOM COVER MODIFICATIONS

Process enhancements, skilled personnel and ongoing capital equipment investments enable Megadyne to stay at the forefront of new design developments and solution delivery to customers across the wide spectrum of industries we serve. Let a Megadyne Technical Sales Representative or Application Engineer create the right belt to deliver optimum performance for your application.


In addition to materials and process selection of the base belt, Megadyne can fully customise our belts with the following machined modifications:

- Custom shapes
- Grinding
- Notching/Knife Cut
- Fabric added to the toothside of belt
- Vacuum Countersinks
- Holes/Perforations
- Pockets
- Slots
- Saw Tooth
- Grooves
- Water Cut


### DEEP GROOVE IN COVER

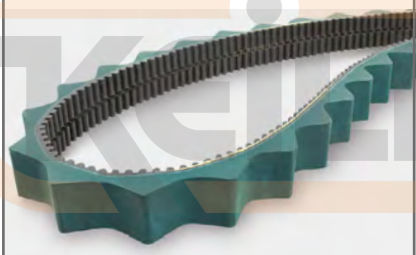


### COUNTERSINK AND HOLE PUNCH




### DIAGONAL SIPES





### TOOTH SIDE GRIND




### SLOTS WITH HOLES



### PROFILES GROOVED IN COVER

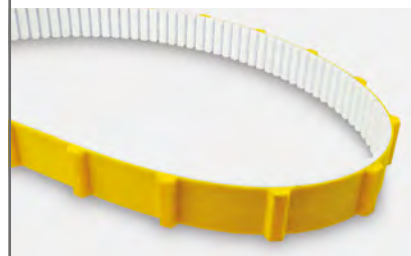

### KNIFE CUT



**CONTACT MEGADYNE FOR  
OTHER CUSTOM OPTIONS AND  
MODIFICATIONS TO FIT YOUR  
PROCESS/APPLICATION.**

**ENGINEERED &  
SPECIALTY BELTS**



# CLEATS

## FLIGHTS OR PROFILES

Cleats, also known as flights or profiles, are practical additions to urethane belts to assist in applications where product separation, sortation, actuation, or pushing. Cleated timing belts are commonly found in application areas where pick and place must be timed for production line accuracy.

MEGALINEAR and MEGAFLEX timing belts can be customised with profiles welded, casted out of a mould or even grinded from over-thickness on the backside of the belt.

All cleats, whether injection moulded or CNC machined are made with high-quality thermoplastic polyurethane.

Cleat Design is determined by the application requirements of the cleat and the size of the product required. Using our flexible production capabilities, Megadyne can design any cleat shape to meet the specific requirements of the customer:

- CNC machined from thermoplastic PU sheet or grinded out of over-thickness
- Injection moulded or casted which are manufactured in our own tool building facilities to guarantee fast service.

The cleats are attached by using high-frequency vibration, high-friction, hot blade, and infrared-welding or even chemical bonding. When made by grinding or casting, the cleats are homogenous.



### CLEAT MATERIALS FOR THERMOPLASTIC BELTS

Our standard cleat is made with 92° ShA white polyurethane. This material is also used to produce MEGALINEAR and MEGAFLEX timing belt.

Cleats can also be supplied in different durometers and in alternative urethane colours. In applications where a hard and wear-resistant cleat is required, a harder durometer like 96 ShA can be provided. Additionally, Megadyne can mould glass fibre reinforced polyurethane.

In addition to our standard 92 ShA or harder 96 ShA urethane, Megadyne can provide EU Food compliant, FDA compliant blue, or transparent polyurethane for the food and pharmaceutical industry with a hardness of 85 ShA. Blue cleats made with the same FDA material as our blue belt are available to ensure materials compatibility for use in food applications.

Selection of the cleat material can be also dependant on the environment temperature (at low ambient temperatures low hardness is recommended). In general, individual cleat colours deviating from the standard can be produced according to indicated RAL number and under consideration of a minimum quantity.

Cleats can be covered by fabrics or made with dual material, like elastomers with metal inserts.

Cleats can be also reworked mechanically out of homogenous belt body. This is especially for high-quantity of cleats with a low pitch distance a very effective way to manufacture cleated belts. As this kind of process is made out of belts produced in over-thickness, the cleat height is limited and depends on the belt type and pitch.

### LOOKING FOR CUSTOM CLEATS?

If you require a unique shape cleat for your specific product application, we can help.

Contact our team for more information.



ENGINEERED &  
SPECIALTY BELTS



# CLEATS

## FLIGHTS OR PROFILES

### CLEAT MATERIALS FOR THERMOSET BELTS

For MEGAPOWER PU belts, cleats are cast in homogeneous fashion as the timing belt is moulded. For this, special tooling is needed. Quantity is a critical factor in determining if this process is right for you. The hardness of the base belt and the cleat is for this kind of manufacturing the same and depends on the selected Thermoset PU.

This kind of processing allows a more accurate tolerance of the cleat position and allows even blind holes in cross direction without an additional reworking.



### DIMENSIONAL TOLERANCES

The dimensional accuracy of injection-moulded cleats depends on the shrinking behaviour of the selected polyurethane, the size and shape of the cleat.

- Injection-moulded cleats have a general tolerance of up to  $\pm 0.3$  mm.
- Mechanically processed cleats have a general dimension tolerance of up to  $\pm 0.5$  mm.
- Smaller tolerances can be achieved depending on the cleat material and must be requested case by case.



## METHODS USED TO WELD CLEATS

### HIGH-FREQUENCY, INFRARED & HOT BLADE

Depending on the shape and quantity of cleats to be welded, thermoplastic cleats can be welded using one of several options. When heating the cleat and base belt, polyurethane melts and creates a bead around the welding point. To avoid any negative impact of this bead on the transport side it will be cleaned accordingly to secure the precise positioning of the transport goods.

In some specific cases, a suitable tool is needed to fully remove the welding bead. The cleaning of welding beads on cleats with glass-fibre reinforcement should be avoided in general. Additional to the bead the welded cleat loses height during the welding process. This height loss is called burn-off and is taken into consideration during cleat design and production.

### COLD WELDING (CHEMICAL BONDING)

During chemical bonding, the thermoplastic polyurethane cleat is permanently connected with the thermoplastic polyurethane base belt. Chemical bonding is preferably used for flat, round, and thin-walled cleats, as in contrary to the hot welding no material melts off, no welding beads and no burn-off occurs. Glass-fibre reinforced polyurethanes cannot be chemically bonded.

### SPECIAL CLEAT DESIGNS

Megadyne can use components made from food-contact approved conveyor belts as cleats, applied with high-frequency technology to TPU timing belt. This hybrid construction is perfect for food applications, such as fruit conveying.

More information and profiles available online in our Technical Manuals:






# CLEATS


## BELT WORKSHEET

|                                                                                                                            |                 |                                     |
|----------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------------------------|
| Application:                                                                                                               |                 |                                     |
| <b>QUANTITY OF CLEATS AND BELTS NEEDED:</b>                                                                                |                 |                                     |
| Base Belt Substrate: <input type="checkbox"/> MEGALINEAR <input type="checkbox"/> MEGAFLEX <input type="checkbox"/> Other: |                 |                                     |
| Cleat colour:                                                                                                              | Cleat material: |                                     |
| FDA: <input type="checkbox"/> yes <input type="checkbox"/> no                                                              |                 |                                     |
| Belt pitch:                                                                                                                | Belt length:    | Belt width:                         |
| Belt cord:                                                                                                                 |                 |                                     |
| Pulley diameter(s) or # of teeth and pitch:                                                                                |                 |                                     |
| Cleats spacing:                                                                                                            |                 |                                     |
| Desired cleat dimensions:                                                                                                  |                 |                                     |
| <b>IF THE CLEATS ARE IN GROUP, PLEASE SPECIFY:</b>                                                                         |                 |                                     |
| Quantity of cleats per group:                                                                                              |                 | Spacing of cleats inside the group: |
| Spacing of the groups:                                                                                                     |                 |                                     |
| Sketch cleat(s) design with all relevant dimensions:                                                                       |                 |                                     |
|                                                                                                                            |                 |                                     |

Some cleats Examples:

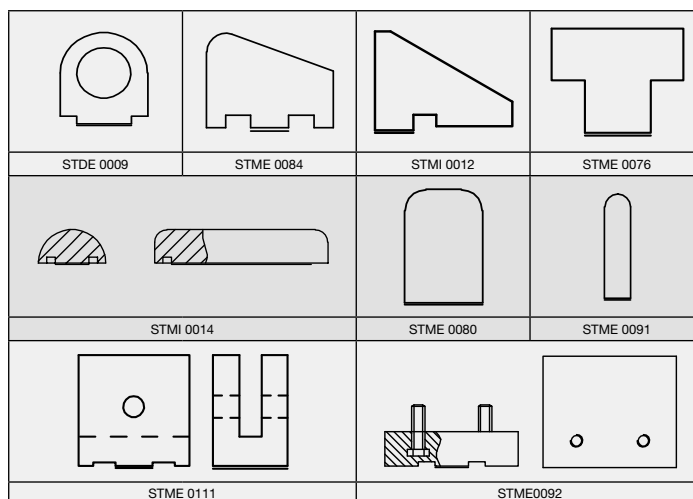

ENGINEERED &  
SPECIALTY BELTS

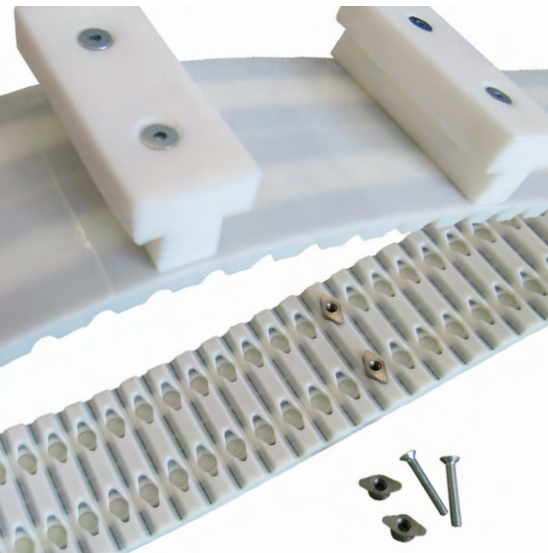

# CLEATS

## MEGAC4T & FALSE TEETH

Our False Tooth product is designed to provide an easy mechanical attachment option for placement of cleats and other profiles and shapes to H, AT10, and AT20 pitches. False Teeth can be added to MEGALINEAR open-ended, MEGAFLEX truly endless thermoplastic, and MEGAPOWER urethane timing belts.

False Teeth with mechanical attachments can be used to offer flexibility of adjustment and positioning in applications where sortation, actuation and product separation are needed such as in pick and place systems, inserting and cartoning machines found in the packaging industry. Megadyne's False Tooth attachments provide a method to reposition or replace broken cleats without the need to replace belts, thus saving time and money.

Additionally, False Teeth used to mount mechanical attachments can be a solution in applications where the forces placed against conventional weld-on cleats are too high and not robust enough to withstand the loads placed on them, which can lead to pull-off failure.

Megadyne standard False Tooth's material is AISI 304 stainless-steel. Contact Megadyne to discuss other material options.

## MEGAC4T

**A SPECIAL SOLUTION IS BECOMING STANDARD!!!**

The fastening system of the exchangeable profile in the tooth of the belt allows a quick assembly and makes the belt extremely versatile — the same belt can be equipped with different profiles for individually transported goods without de-installation. The highly variable profile pitch will standardise any application.

### ADVANTAGES OF MEGADYNE FALSE TEETH:


- Easy installation and removal of cleats
- Precise profile positioning
- Cost reduction in assembly and maintenance:
  - No removal of belt needed to replace cleats
- Different cleat materials can be used
- Stainless-steel false teeth suitable for food & pharmaceutical industry
- Available with NFT/NFB, FDA Urethane and with steel aramid or stainless-steel cords. Self-tracking belts can also be provided.



### AVAILABLE ON FOLLOWING BELTS:

| PITCH AND WIDTH | HOLE SPACING (mm) | # OF HOLES | DIAMETER OF HOLE (mm) | POST THREAD SIZE |
|-----------------|-------------------|------------|-----------------------|------------------|
| H50             | 25                | 2          | 6 +/-0.3              | M4               |
| 25AT10          | 12 +/-0.2         | 2          | 6 +/-0.3              | M4               |
| 32AT10          | 20 +/-0.2         | 2          | 6 +/-0.3              | M4               |
| 50AT10          | 25 +/-0.2         | 2          | 6 +/-0.3              | M4               |
| 75AT10          | 25 +/-0.2         | 3          | 6 +/-0.3              | M4               |
| 100AT10         | 25+/-0.2          | 4          | 6 +/-0.3              | M4               |
| 25AT20          | -                 | 1          | 7.5 +/-0.3            | M5               |
| 32AT20          | 20 +/-0.2         | 2          | 7.5 +/-0.3            | M5               |
| 50AT20          | 25 +/-0.2         | 2          | 7.5 +/-0.3            | M5               |
| 75AT20          | 25 +/-0.2         | 3          | 7.5 +/-0.3            | M5               |
| 100AT20         | 25 +/-0.2         | 4          | 7.5 +/-0.3            | M5               |

ENGINEERED & SPECIALTY BELTS

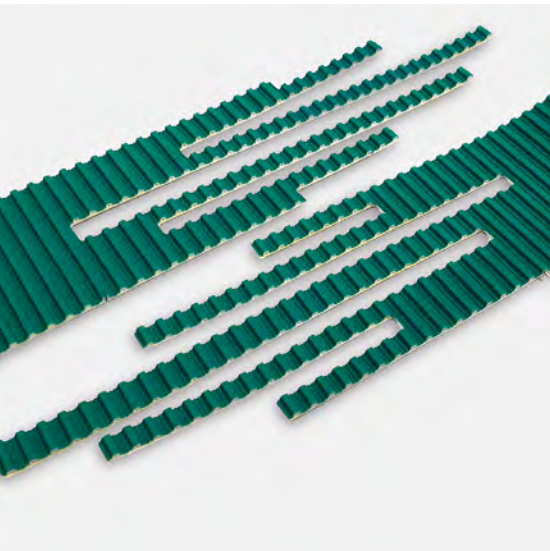

# MODIFICATIONS

## PROGRESSIVE PIN JOINT SYSTEM (PPJ)

Megadyne's Progressive Pin Joint (PPJ) system provides a simple, reliable method of placing a timing belt on an application without the need to tear apart the conveyor or join the belt endless online. PPJ is a perfect option for parallel path belts where the load being moved is spread across several belts. Installation and replacement of belts is fast, simple and cost-saving.

### PPJ IS AVAILABLE FOR THE FOLLOWING BELT TYPES:

| BELT TYPE  | WIDTH (mm)    | BELT TYPE      | WIDTH (mm)      |
|------------|---------------|----------------|-----------------|
| T10/AT10   | 25            | T20/AT20/ATG20 | 75              |
| TG10 K6    | 25            | MTD8/RPP8      | 20              |
| T10/AT10   | 32            | MTD8/RPP8      | 30              |
| T10/AT10   | 50            | MTD8/RPP8      | 50              |
| T10/AT10   | 75            | MTD8/RPP8      | 85              |
| T10/AT10   | 100           | MTD8/RPP8      | 100             |
| TG10/ATG10 | 50            | MTD14          | 55              |
| T20/AT20   | 32            | MTD14          | 85              |
| T20/AT20   | 50            | H075           | 19.05 (0.75 in) |
| HG150      | 38.1 (1.5 in) | H100           | 25.4 (1 in)     |
| HG200      | 50.8 (2 in)   | H200           | 50.8 (2 in)     |


For different widths please consult Megadyne.

### AVAILABLE PITCHES AND STEEL CORD TYPES:

| STANDARD                                          | HIGH FLEX           | STAINLESS                       |
|---------------------------------------------------|---------------------|---------------------------------|
| T10, AT10, TG10<br>ATG10, T20<br>AT20, MTD8, RPP8 | T10, AT10 T20, AT20 | T10, AT10 TG10, ATG10,<br>MTD14 |

If Kevlar® cords are required please consult Megadyne.

### AVAILABLE COVERS ON PPJ BELTS:

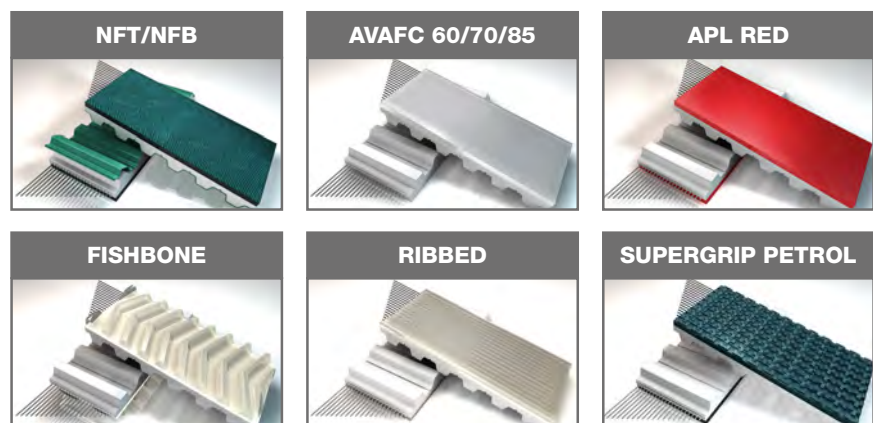


Contact Megadyne to discuss other cover material options.

ENGINEERED &  
SPECIALTY BELTS



# ENGINEERED SOLUTIONS

ENGINEERED BELTS  
HYBRID BELTS

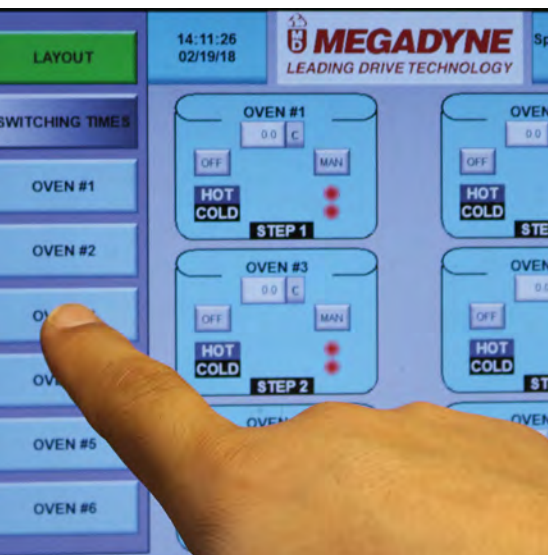

# ENGINEERED SOLUTIONS


## ENGINEERED BELTS

Megadyne offers several advanced engineered elastomers and processes to produce high-precision belts for applications within packaging, business machines, aerospace and medical applications.

These elastomers offer performance benefits ranging from high-temperature resistance to outstanding flex fatigue to electrical insulation. Elastomers within this class can be spun cast, moulded, wrapped or ultrasonically welded to deliver the performance needed in the toughest applications.




| MATERIAL                                                        | FILM BELTS            |                        | SPIN CASTING                 |                      |
|-----------------------------------------------------------------|-----------------------|------------------------|------------------------------|----------------------|
|                                                                 | MYLAR®                | KAPTON®                | HYTREL®                      | URETHANE             |
| HARDNESS (SHORE A)                                              | N/A                   | N/A                    | 30/40/50/60/70               | 60/80                |
| COLOURS                                                         | ○                     | ●                      | ●                            | ●●●●●                |
| THICKNESS RANGE                                                 | 0.003-0.014"          | 0.001-0.005"           | 0.010 to 0.040"              | 0.020 to 0.125"      |
| WORKING TEMP RANGE °F (°C)                                      | -94/+320 (-70 /+160)  | -148/+716 (-100 /+380) | -40/+212 (-40 /+100)         | -4/+176 (-20 /+80)   |
| WATER RESISTANCE                                                | Good                  | Good                   | Good                         | Good                 |
| ABRASION RESISTANCE                                             | Very Good             | Very Good              | Good                         | Good                 |
| OIL RESISTANCE**                                                | Good                  | Very Good              | Very Good                    | Good                 |
| FOOD CONTACT APPROVED                                           | Yes                   | Yes                    | No                           | No                   |
| OTHER BENEFITS                                                  | Electrical Insulation | UL94 VO Fire Rating    | High Flex Fatigue Resistance | Hydrolytic Stability |
| Mylar®, Kapton® and Hytrel® are registered trademarks of DuPont |                       |                        |                              |                      |


ENGINEERED &  
SPECIALTY BELTS

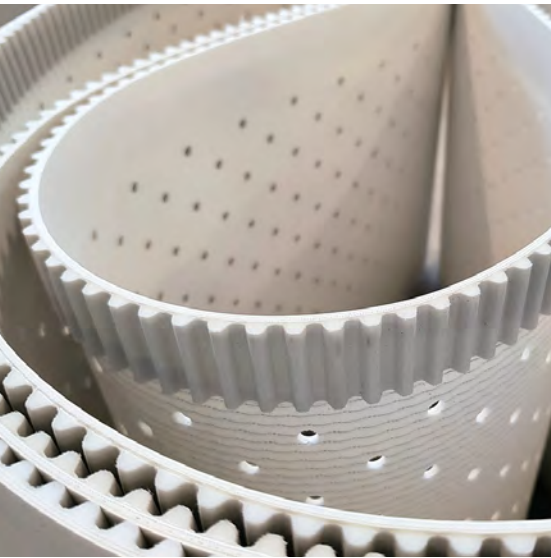

# ENGINEERED SOLUTIONS

## PHOTOS

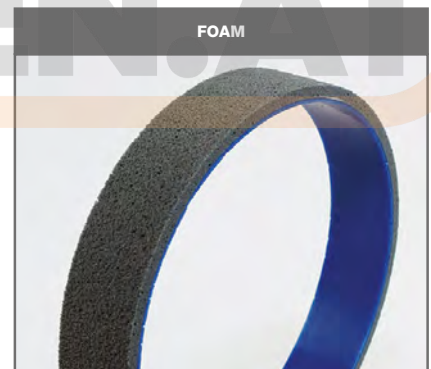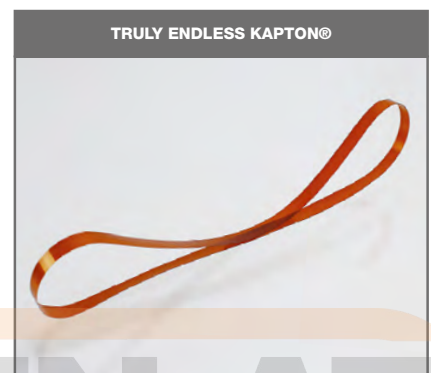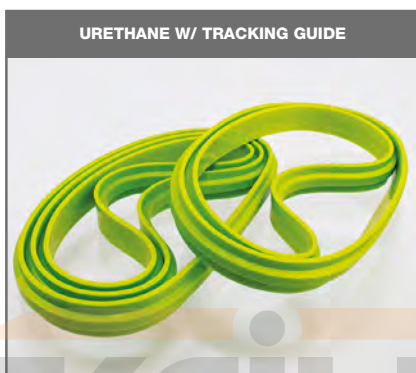

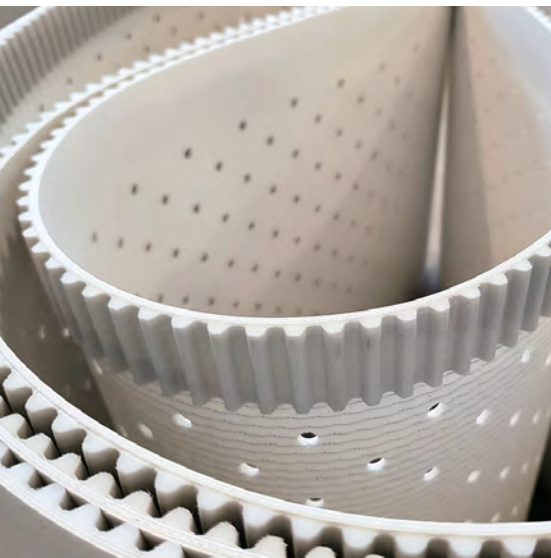




# ENGINEERED SOLUTIONS

## HYBRID BELTS


Hybrid belts deliver synchronisation and conveying in one belt design. Starting with conveyor belts, we add extruded timing belts to provide precise positioning and accurate tracking. We have successfully implemented the Hybrid solution in several markets & industry sections, which allows us to enlarge our product portfolio.

Hybrid, Hybrid Plus and Hybrid Pro belts are available with polyurethane or silicone covers and available with the following urethane belt pitches- H, T5, T10, MTD5, MTD8M, STD8M, T20, T5 BLUE FC, T10 BLUE FC, AT5, AT10, and AT20 with a base surface of Fabric and Elastoflex. Additionally, with the high-variation and flexibility of our Synthetic and Conveyor portfolio and with the enormous reworking capabilities such as hole perforating and cleat & rope welding we have the perfect solution for any type of application.

| TYPE                           | HYBRID                                                                        |                                                                    | HYBRID PLUS                                                                   |                                                                    | HYBRID PRO PLUS                                     |                                                                    |
|--------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------|-----------------------------------------------------|--------------------------------------------------------------------|
|                                |                                                                               |                                                                    |                                                                               |                                                                    |                                                     |                                                                    |
| CONVEYOR BELT                  | PUCON, SILCON, FABCON, ELASTOFLEX                                             |                                                                    | PUCON, SILCON, FABCON, ELASTOFLEX                                             |                                                                    | PUCON, SILCON, FABCON, ELASTOFLEX                   |                                                                    |
| CONVEYOR BELT FABRIC           | Rigid, Light Rigid and Flexible Polyester                                     |                                                                    | Rigid, Light Rigid and Flexible Polyester                                     |                                                                    | Rigid, Light Rigid and Flexible Polyester           |                                                                    |
| MEGALINEAR BELT TYPE AND PITCH | H, T5, T10, MTD5, MTD8M, STD8M, T20, T5 BLUE FC, T10 BLUE FC, AT5, AT10, AT20 |                                                                    | H, T5, T10, MTD5, MTD8M, STD8M, T20, T5 BLUE FC, T10 BLUE FC, AT5, AT10, AT20 |                                                                    | QST5, QST8, QST14                                   |                                                                    |
| MEGALINEAR CORD TYPES          | Kevlar®, No cord                                                              |                                                                    | Kevlar®, No cord                                                              |                                                                    | No cord                                             |                                                                    |
| MEGALINEAR DUROMETER/COLOR     | 92A                                                                           | <div><div></div><div></div><div></div><div></div><div></div></div> | 92A                                                                           | <div><div></div><div></div><div></div><div></div><div></div></div> | 92A                                                 | <div><div></div><div></div><div></div><div></div><div></div></div> |
| MEGALINEAR NFT                 | Yes                                                                           |                                                                    | Yes                                                                           |                                                                    | Yes                                                 |                                                                    |
| # OF MEGALINEAR BELTS          | One-centered, belt bottom                                                     |                                                                    | Two or more as per customer design                                            |                                                                    | Two, belt edges                                     |                                                                    |
| MAX BELT WIDTH (mm)            | 1000                                                                          |                                                                    | 2000                                                                          |                                                                    | 2000                                                |                                                                    |
| ADVANTAGES                     | Driven speeds up to 500 m/min.<br>Precision positioning<br>Energy savings     |                                                                    |                                                                               |                                                                    | Enables compact conveyor designs<br>Low noise level |                                                                    |
| INDUSTRIES                     | <div><div></div><div></div><div></div><div></div><div></div></div>            |                                                                    |                                                                               |                                                                    |                                                     |                                                                    |

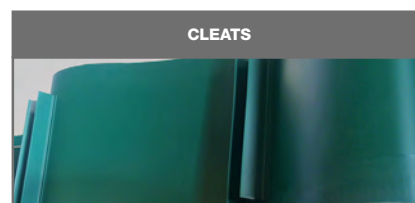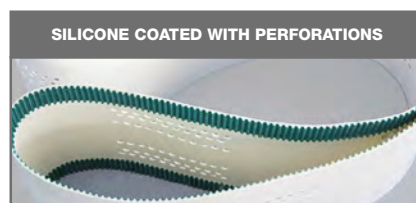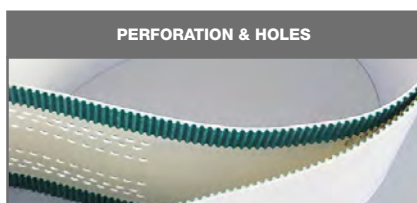

## ENGINEERED & SPECIALTY BELTS

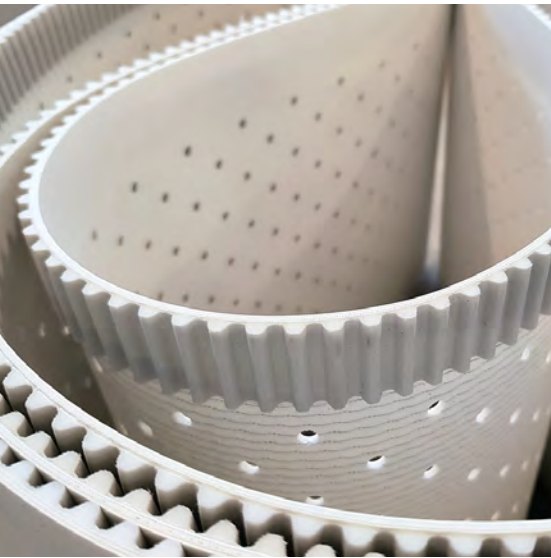


# ENGINEERED SOLUTIONS

## HYBRID BELTS

Hybrid Vacuum is a unique design where synchronization, and an open mesh (used for drainage or vacuum), are combined into one belt design.

### SPIRAFLEX

**Spiraflex** grid conveyor belts are used in diaper manufacturing and to produce other hygienic products as-well-as the transportation of fresh pasta and licorice. In the Food Industry, Spiraflex can replace traditional metal wire mesh conveyor belts. In the case of conveying fresh pasta or dough, Spiraflex allows the steam sprayed by the machinery inside a tunnel, to eliminate the residual flour of the product. In the case of licorice transport, Spiraflex resists steam used to get a glossy finish on the surface of product.
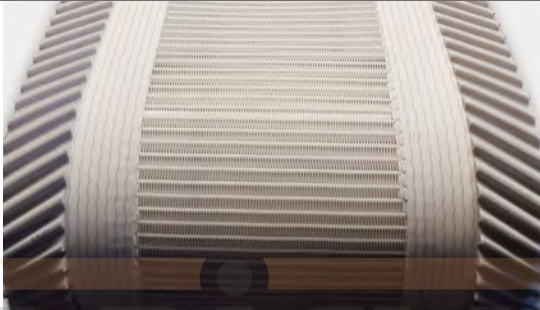
| TYPE                           | HYBRID VACUUM                                                                                                                                                                                                                                                                                                                                                                                                                       | SPIRAFLEX                                                                                                                                                                   |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CONVEYOR BELT                  |                                                                                                                                                                                                                                                                                                                                                   |                                                                                          |
| CONVEYOR BELT FABRIC           | Polyester open mesh with PUCON                                                                                                                                                                                                                                                                                                                                                                                                      | Spiraflex                                                                                                                                                                   |
| MEGALINEAR BELT TYPE AND PITCH | Rigid polyester<br>H, T5, T10, MTD5, MTD8M, STD8M, T20, T5 BLUE FC, T10 BLUE FC, AT5, AT10, AT20                                                                                                                                                                                                                                                                                                                                    | Polyester with reinforced edges                                                                                                                                             |
| MEGALINEAR CORD TYPES          | Kevlar®, No cord                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                             |
| MEGALINEAR DUROMETER/COLOR     | 92A <input type="radio"/> <input checked="" type="radio"/>                                                                                                                                                                                                                                                                                                                                                                          | — <input type="radio"/> <input checked="" type="radio"/> <input type="radio"/>                                                                                              |
| MEGALINEAR NFT                 | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                             |
| # OF MEGALINEAR BELTS          | Two, belt edges                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                             |
| MAX BELT WIDTH (mm)            | 2000                                                                                                                                                                                                                                                                                                                                                                                                                                | 2000                                                                                                                                                                        |
| ADVANTAGES                     | Driven speeds up to 500 m/min.<br>Precision positioning<br>Energy savings<br>Enables compact conveyor designs<br>Open mesh allows vacuum or drainage                                                                                                                                                                                                                                                                                | Excellent suction properties<br>Customization<br>Low weight                                                                                                                 |
| INDUSTRIES                     |      |   |