


PIX-BRAWN[®]-XT

High-strength, Timing+Poly-V Belts

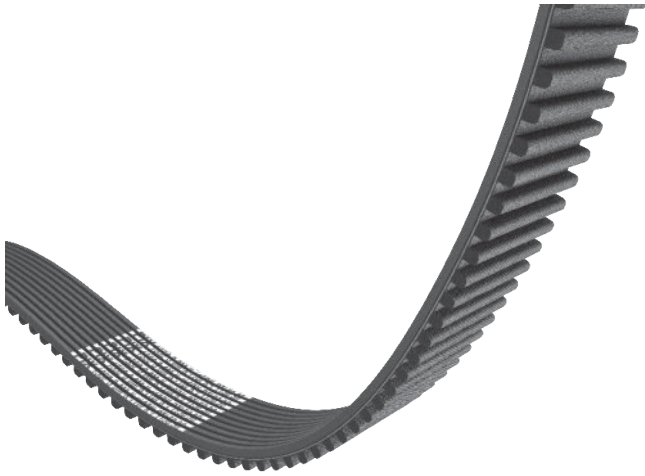

Features:

- **Combines the advantages of Timing and Poly-V Belts**
- Transverse teeth for positive engagement on one side and longitudinal ribs for nonsynchronous frictional transmission on other side
- **Suitable for multi-shaft transmission with reversed rotary directions of pulleys**
- Specially treated Aramid cords for high tensile strength and adhesion
- Anti-static, oil and heat resistant
- **Noise-free transmission**
- Operating temperature range -35°C to +130°C

Product range:

Timing Belt Section	No. of Ribs		Length (mm)
	PK	PL	
8M	6 to 126	6 to 95	1200 - 4400
S8M	6 to 126	6 to 95	1200 - 3200
14M	6 to 117	6 to 88	1200 - 4578

Reference standards: RMA/MPTA IP-26, ISO 13050

Application: Flour and rice mills, food-grain machinery, etc.