


# PIX-Terminator®-HXS

## Heavy-duty, Aramid-corded, Banded Wrap Belts

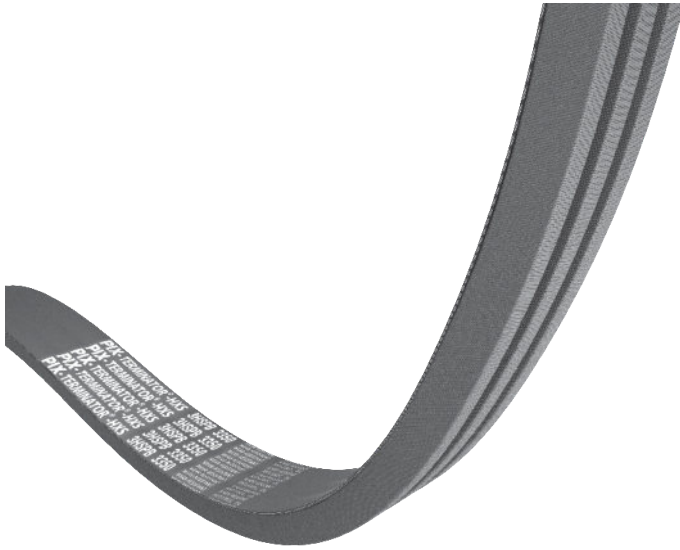

### Features:

- Superior power transmission capacity - Up to 70% more than standard single Belts
- Especially treated outer tough fabric cover reduces sidewall wear rate and offers enhanced flexibility
- Top curvature profile and special frictionless fabric to enhance the heat dissipation rate
- Special aramid cords for high tensile strength and minimum elongation
- Designed to exhibit excellent durability, strength, abrasion and wear resistance
- Best suited for heavy shock and impulse load drives
- Extended temperature range: -25°C to +100°C

**Product range:** TR-HB, TR-HC, TR-HSPA, TR-HSPB, TR-HSPC, TR-H5V, TR-H8V

**Application:** Vibrating screens, reclaimers, pulverisers, heavy duty mixers, forestry woodcutters, wood chippers, surface miners, stackers, stone crushers, jaw crushers, cone crushers, ball-mills, etc.

**PIX-Terminator®-HXS Heavy-duty, Aramid-corded, Banded Wrap Belts**

Section: Terminator-HB  
 Reference Standard: ISO 5291, BS 3790


**TERMINATOR-HB / 17x13.5****Features:**

- Superior power transmission capacity - Up to 70% more than standard single Belts
- Especially treated outer tough fabric cover reduces sidewall wear rate and offers enhanced flexibility
- Top curvature profile and special frictionless fabric to enhance the heat dissipation rate
- Special aramid cords for high tensile strength and minimum elongation
- Designed to exhibit excellent durability, strength, abrasion and wear resistance
- Best suited for heavy shock and impulse load drives
- Extended temperature range: -25°C to +100°C

Mfg. range	Weight/metre (Kgs)
49" to 900"	0.270

Section	Dimensions (mm)		Angle (Degree)	Reco. min pulley dia.
	Top width	Thickness		
HB	17	13.5	40	210 mm

'e' = 19 mm, Length designation: 'L' (inches)

**PIX-Terminator®-HXS Heavy-duty, Aramid-corded, Banded Wrap Belts**

Section: Terminator-HC  
 Reference Standard: ISO 5291, BS 3790


**TERMINATOR-HC / 22x17****Features:**

- Superior power transmission capacity - Up to 70% more than standard single Belts
- Especially treated outer tough fabric cover reduces sidewall wear rate and offers enhanced flexibility
- Top curvature profile and special frictionless fabric to enhance the heat dissipation rate
- Special aramid cords for high tensile strength and minimum elongation
- Designed to exhibit excellent durability, strength, abrasion and wear resistance
- Best suited for heavy shock and impulse load drives
- Extended temperature range: -25°C to +100°C

Mfg. range	Weight/metre (Kgs)
47" to 923"	0.445

Section	Dimensions (mm)		Angle (Degree)	Reco. min pulley dia.
	Top width	Thickness		
HC	22	17	40	210 mm

'e' = 25.5 mm, Length designation: 'L' (inches)



**PIX-Terminator®-HXS Heavy-duty, Aramid-corded, Banded Wrap Belts**Section: Terminator-HSPA  
Reference Standard: BS 3790**TERMINATOR-HSPA / 13x12**


## Features:

- Superior power transmission capacity - Up to 70% more than standard single Belts
- Especially treated outer tough fabric cover reduces sidewall wear rate and offers enhanced flexibility
- Top curvature profile and special frictionless fabric to enhance the heat dissipation rate
- Special aramid cords for high tensile strength and minimum elongation
- Designed to exhibit excellent durability, strength, abrasion and wear resistance
- Best suited for heavy shock and impulse load drives
- Extended temperature range: -25°C to +100°C

Mfg. range	Weight/metre (Kgs)
959 to 4439mm	0.179

Section	Dimensions (mm)		Angle (Degree)	Reco. min pulley dia.
	Top width	Thickness		
HSPA	13	12	40	224 mm

‘e’ = 15.0 mm, Length designation: ‘Lp’

**PIX-Terminator®-HXS Heavy-duty, Aramid-corded, Banded Wrap Belts**Section: Terminator-HSPB  
Reference Standard: BS 3790**TERMINATOR-HSPB / 17x17**


## Features:

- Superior power transmission capacity - Up to 70% more than standard single Belts
- Especially treated outer tough fabric cover reduces sidewall wear rate and offers enhanced flexibility
- Top curvature profile and special frictionless fabric to enhance the heat dissipation rate
- Special aramid cords for high tensile strength and minimum elongation
- Designed to exhibit excellent durability, strength, abrasion and wear resistance
- Best suited for heavy shock and impulse load drives
- Extended temperature range: -25°C to +100°C

Mfg. range	Weight/metre (Kgs)
1762 to 10060mm	0.309

Section	Dimensions (mm)		Angle (Degree)	Reco. min pulley dia.
	Top width	Thickness		
HSPB	17	17	40	160 mm

‘e’ = 19 mm, Length designation: ‘Lp’

**PIX-Terminator®-HXS Heavy-duty, Aramid-corded, Banded Wrap Belts**Section: Terminator-HSPC  
Reference Standard: BS 3790**TERMINATOR-HSPC / 22x22.5**


## Features:

- Superior power transmission capacity - Up to 70% more than standard single Belts
- Especially treated outer tough fabric cover reduces sidewall wear rate and offers enhanced flexibility
- Top curvature profile and special frictionless fabric to enhance the heat dissipation rate
- Special aramid cords for high tensile strength and minimum elongation
- Designed to exhibit excellent durability, strength, abrasion and wear resistance
- Best suited for heavy shock and impulse load drives
- Extended temperature range: -25°C to +100°C

Mfg. range	Weight/metre (Kgs)
1632 to 23527mm	0.562

Section	Dimensions (mm)		Angle (Degree)	Reco. min pulley dia.
	Top width	Thickness		
HSPC	22	22.5	40	224 mm

‘e’ = 25.5 mm, Length designation: ‘Lp’



**PIX-Terminator®-HXS Heavy-duty, Aramid-corded, Banded Wrap Belts**

Section: Terminator-H5V  
Reference Standard: ISO 5290

**TERMINATOR-H5V / 15.8x16.5**


Features:

- Superior power transmission capacity - Up to 70% more than standard single Belts
- Especially treated outer tough fabric cover reduces sidewall wear rate and offers enhanced flexibility
- Top curvature profile and special frictionless fabric to enhance the heat dissipation rate
- Special aramid cords for high tensile strength and minimum elongation
- Designed to exhibit excellent durability, strength, abrasion and wear resistance
- Best suited for heavy shock and impulse load drives
- Extended temperature range: -25°C to +100°C

Mfg. range	Weight/metre (Kgs)
50" to 923"	0.268

Section	Dimensions (mm)		Angle (Degree)	Reco. min pulley dia.
	Top width	Thickness		
H5V	15.8	16.5	40	180 mm

'e' = 17.5 mm, Length designation: 'La'



**PIX-Terminator®-HXS Heavy-duty, Aramid-corded, Banded Wrap Belts**

Section: Terminator-H8V  
Reference Standard: ISO 5290

**TERMINATOR-H8V / 25.4x25**


Features:

- Superior power transmission capacity - Up to 70% more than standard single Belts
- Especially treated outer tough fabric cover reduces sidewall wear rate and offers enhanced flexibility
- Top curvature profile and special frictionless fabric to enhance the heat dissipation rate
- Special aramid cords for high tensile strength and minimum elongation
- Designed to exhibit excellent durability, strength, abrasion and wear resistance
- Best suited for heavy shock and impulse load drives
- Extended temperature range: -25°C to +100°C

Mfg. range	Weight/metre (Kgs)
100" to 928"	0.684

Section	Dimensions (mm)		Angle (Degree)	Reco. min pulley dia.
	Top width	Thickness		
H8V	25.4	25	40	317 mm

'e' = 28.6 mm, Length designation: 'La'



**Standard Designation**

