


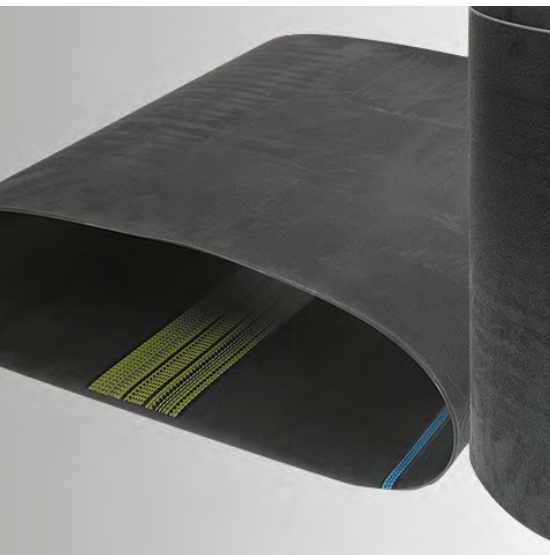

STANDARD RUBBER RIBBED

PV BELTS


PV standard rubber ribbed belts are made of polybutadiene compound and produced in PH, PJ, PK, PL and PM profiles.

PV BELTS DESIGN:

- Eliminates belt matching
- Permits drive design to meet exact power or space requirements
- Distributes the drive load across the entire belt width
- Permits cooler running and high drive efficiency
- Excels on small pulleys at high speeds

PV ribbed belts are also available in elastic version (TEM) and they are suitable in the transmission where fixed centre distance is required. The TEM belt is developed according to the customer requirements.

STANDARD RANGE:

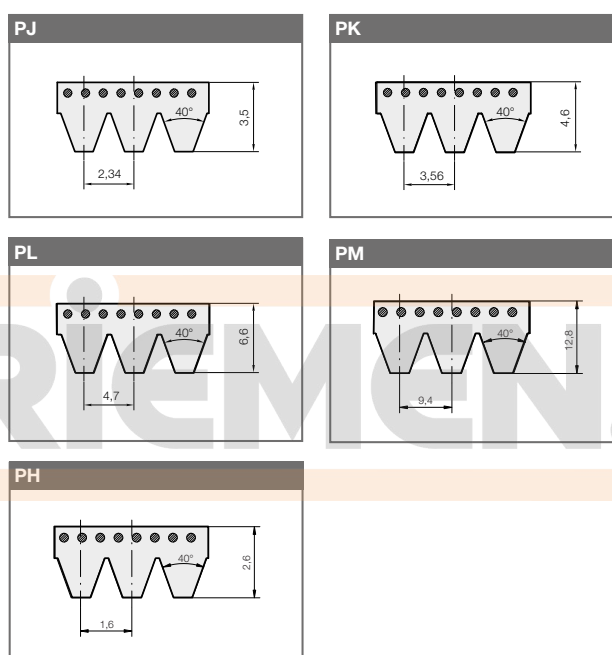

MULTI-RIB BELTS



STANDARD RUBBER RIBBED BELTS

PJ	
EFFECTIVE LENGTH	
(mm)	(inches)
350	13,8
381	15,0
406	16,0
432	17,0
457	18,0
483	19,0
495	19,5
508	20,0
533	21,0
559	22,0
584	23,0
610	24,0
635	25,0
650	25,6
660	26,0
685	27,0
711	28,0
723	28,5
737	29,0
762	30,0
769	30,3
790	31,1
813	32,0
864	34,0
895	35,2
914	36,0
944	37,2
955	37,6
965	38,0
990	39,0
1016	40,0
1036	40,8
1040	40,9
1051	41,4
1065	41,9
1080	42,5
1089	42,9
1092	43,0
1100	43,3
1108	43,6
1116	43,9
1136	44,7
1143	45,0
1150	45,3
1160	45,7
1168	46,0
1170	46,1
1184	46,6
1190	46,9
1194	47,0
1200	47,2
1203	47,4
1210	47,6
1214	47,8
1222	48,1
1232	48,5
1236	48,7
1244	49,0
1262	49,7
1270	50,0
1280	50,4

1287	50,7
1295	51,0
1301	51,0
1302	51,3
1315	51,8
1318	51,9
1321	52,0
1326	52,2
1365	53,7
1371	54,0
1397	55,0
1428	56,2
1473	58,0
1524	60,0
1549	61,0
1600	63,0
1651	65,0
1752	69,0
1854	73,0
1895	74,6
1910	75,2
1930	76,0
1956	77,0
2083	82,0
2135	84,1
2210	87,0
2337	92,0
2489	98,0

PK	
EFFECTIVE LENGTH	
(mm)	(inches)
588	23,1
630	24,8
650	25,6
675	26,6
700	27,6
730	28,7
755	29,7
775	30,5
800	31,5
830	32,7
845	33,3
870	34,3
875	34,4
885	34,8
920	36,2
925	36,4
950	37,4
970	38,2
1000	39,4
1015	40,0
1035	40,8
1060	41,7
1080	42,5
1145	45,1
1165	45,9
1200	47,2
1230	48,4
1300	51,2
1335	52,6
1385	54,5
1420	55,9
1460	57,5

1490	58,7
1520	59,8
1555	61,2
1610	63,4
1655	65,2
1700	66,9
1725	67,9
1755	69,1
1800	70,9
1860	73,2
1885	74,2
1900	74,8
1980	78,0
2050	80,7
2080	81,9
2145	84,5
2235	88,0
2330	91,7
2490	98,03
2555	100,59

PL	
EFFECTIVE LENGTH	
(mm)	(inches)
953	37,5
991	39,0
1041	41,0
1074	42,3
1080	42,5
1100	43,3
1150	45,3
1168	46,0
1194	47,0
1219	48,0
1270	50,0
1295	51,0
1321	52,0
1334	52,5
1372	54,0
1397	55,0
1422	56,0
1435	56,5
1473	58,0
1498	59,0
1511	59,5
1562	61,5
1613	63,5
1651	65,0
1664	65,5
1715	67,5
1765	69,5
1803	71,0
1842	72,5
1943	76,5
1956	77,0
1981	78,0
2019	79,5
2070	81,5
2096	82,5
2134	84,0
2197	86,5
2235	88,0
2324	91,5

2362	93,0
2477	97,5
2515	99,0
2705	106,5
2743	108,0
2845	112,0
2896	114,0
2921	115,0
2997	118,0
3086	121,5
3124	123,0
3289	129,5
3327	131,0
3493	137,0
3696	145,5
4051	159,5
4191	165,0
4470	176,0
4623	182,0
5029	198,0

PM	
EFFECTIVE LENGTH	
(mm)	(inches)
2286	90,0
2388	94,0
2515	99,0
2693	106,0
2832	111,5
2921	115,0
3010	118,5
3124	123,0
3327	131,0
3531	139,0
3734	147,0
4089	161,0
4191	165,0
4470	176,0
4648	183,0
5029	198,0
5410	213,0
6121	241,0
6883	271,0
7646	301,0
8408	331,0
9169	361,0
9931	391,0
10693	421,0
12217	481,0
13741	541,0
15266	601,0
16764	660,0

PH	
EFFECTIVE LENGTH	
(mm)	(inches)
584	23,0
1025	40,4
1030	40,6
1068	42,0
1140	44,9
1164	45,8
1184	46,6
1200	47,2
1210	47,6
1265	49,8
1809	71,2
1831	72,1
1856	73,1
1872	73,7
1891	74,4
1900	74,8
1915	75,4
1922	75,7
1930	76,0
1945	76,6
1975	77,8

MULTI-RIB BELTS

