


# PIX-Duo®-XT

## Twin-power, Double-sided, Timing Belts

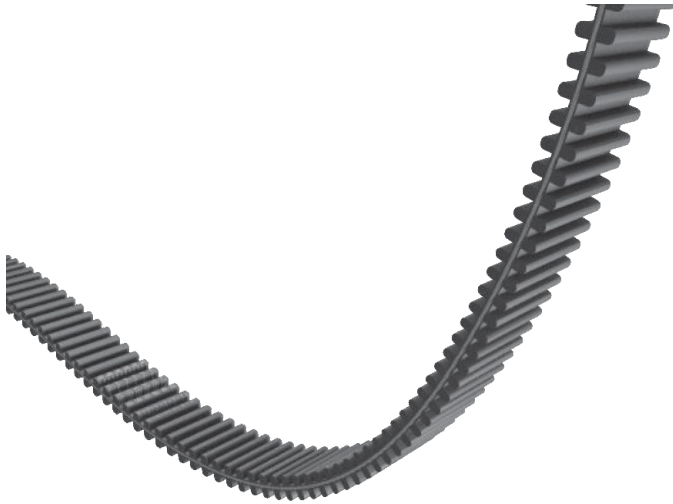


### Features:

- Facilitates power transmission from both sides of the Belt
- Highly flexible
- Extended stability, durability, strength and life
- Temperature range: -25°C to +100°C

### Product range:


Section	Pitch 'P' (mm)	Belt Thickness 'T' (mm)	Teeth Height 'h' (mm)	Manufacturing Range		Length Designation
				Min.	Max.	
DA-XL	5.080	3.05	1.27	20.0"	58.0"	Lp
DA-L	9.525	4.58	1.91	18.7"	66.0"	Lp
DA-H	12.700	5.96	2.29	20.0"	272.0"	Lp
DA-3M	3.000	3.10	1.17	501mm	1401mm	Lp
DA-5M	5.000	5.26	2.06	400mm	3200mm	Lp
DA-8M	8.000	8.17	3.48	512mm	4400mm	Lp
DA-14M	14.000	14.8	6.02	1400mm	6860mm	Lp
DA-S5M	5.000	5.00	1.91	410mm	3200mm	Lp
DA-S8M	8.000	7.50	3.05	512mm	6640mm	Lp

Section	No. of Teeth	Price (€)	Sleeve Width (mm)
DA-16-S 8M-1800	225		180
DA-16-S 8M-2000	250		180
DA-20-S 8M-1600	200		200
DA-20-S 8M-1760	220		180
DA-20-S 8M-2000	250		180
DA-20-S 8M-2600	325		180
DA-25-S 8M-1760	220		180
DA-25-S 8M-1800	225		180
DA-25-S 8M-2000	250		180

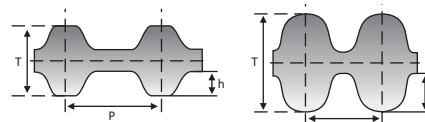

DA-XL, DA-L, DA-H

DA-3M, DA-5M, DA-8M



DA-14M, DA-S5M, DA-S8M