


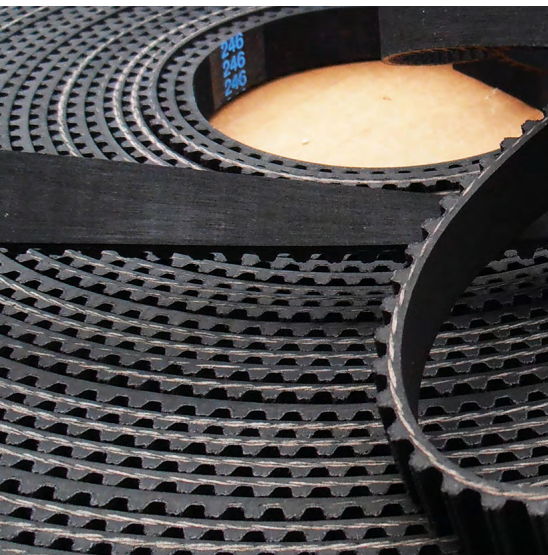


RUBBER OPEN-ENDED


TIMING BELT ROLLS

Rubber open-ended synchronous belts are specially suitable for linear drives, accurate positioning and reversal drives. A high load capacity, no maintenance cost and very low noise level, make this belt a perfect alternative to chain or cable reverse drives.


Megadyne open-ended rubber belts, produced both in straight and spiral cut, are available in the following profiles, pitches and constructions:

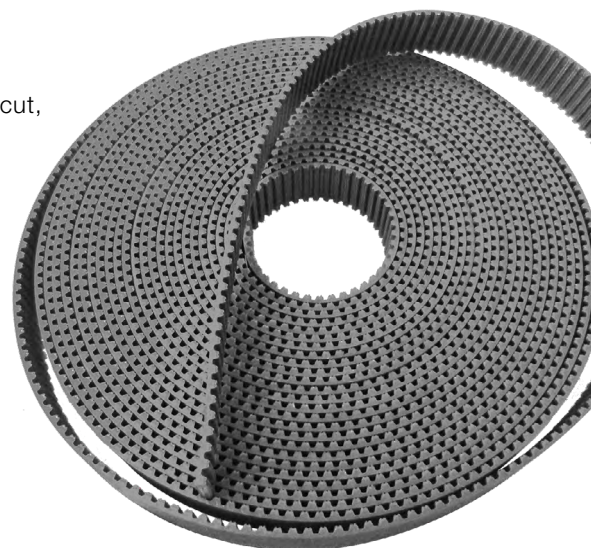

STANDARD RANGE:

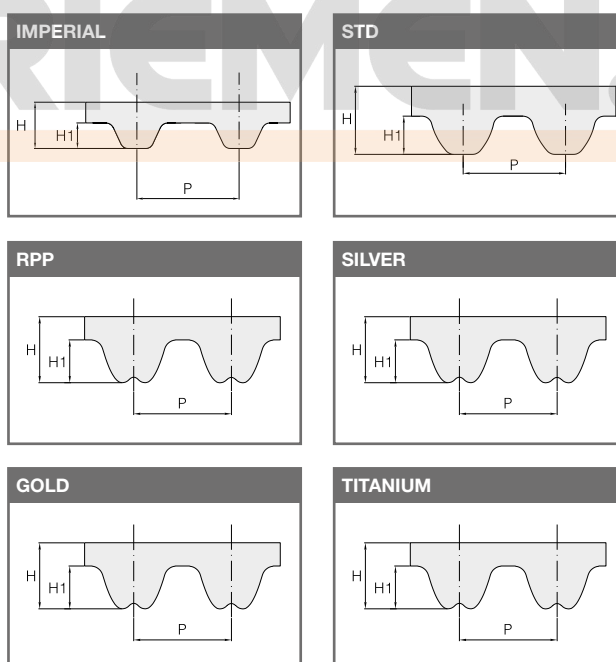

(SLV3 14M • GLD2 8M • GLD2 14M ON DEMAND)

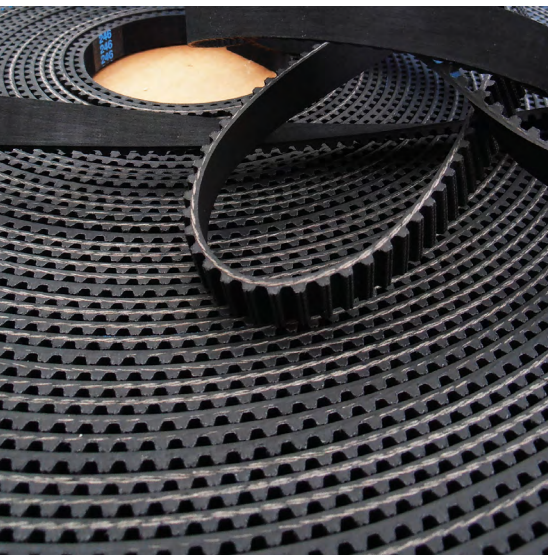

RUBBER OPEN-ENDED

TIMING BELT ROLLS

MXL	
STD. WIDTH (inches)	
	0,25
	0,31
	0,37
P	2,032
H	1,14
H ₁	0,51

XL	
STD. WIDTH (inches)	
	0,25
	0,31
	0,37
P	5,08
H	2,4
H ₁	1,27

L	
STD. WIDTH (inches)	
	0,50
	0,75
	1,00
P	9,525
H	3,8
H ₁	1,91

H	
STD. WIDTH (inches)	
	0,50
	0,75
	1,00
	1,50
	2,00
	3,00
P	12,7
H	4,4
H ₁	2,29

STD8	
STD. WIDTH (mm)	
	10
	12
	15
	20
	25
P	8
H	5,4
H ₁	3,05

RPP3	
STD. WIDTH (mm)	
	9
	12
	15
P	3
H	2,4
H ₁	1,15

RPP5	
STD. WIDTH (mm)	
	9
	12
	15
	20
	25
	30
P	5
H	3,8
H ₁	2

RPP8	
STD. WIDTH (mm)	
	10
	15
	20
	25
	30
	50
	85
P	8
H	5,4
H ₁	3,2

RPP STEEL 8	
STD. WIDTH (mm)	
	10
	15
	20
	30
	50
P	8
H	5,45
H ₁	3,2

RPP STEEL 14	
STD. WIDTH (mm)	
	25
	40
	55
	85
P	14
H	9,65
H ₁	6,3

SLV3 3M	
STD. WIDTH (mm)	
	10
	15
	20
	25
P	3
H	2,4
H ₁	1,15

SLV3 5M	
STD. WIDTH (mm)	
	15
	25
P	5
H	3,8
H ₁	2

SLV3 8M	
STD. WIDTH (mm)	
	10
	15
	20
	25
P	8
H	5,4
H ₁	3,2

TTM8	
STD. WIDTH (mm)	
	10
	12
	15
	20
	25
	30
	50
P	8
H	5,3
H ₁	3,2

TTM14	
STD. WIDTH (mm)	
	15
	20
	25
	37
P	14
H	6,1
H ₁	9,4

TIMING BELTS

