
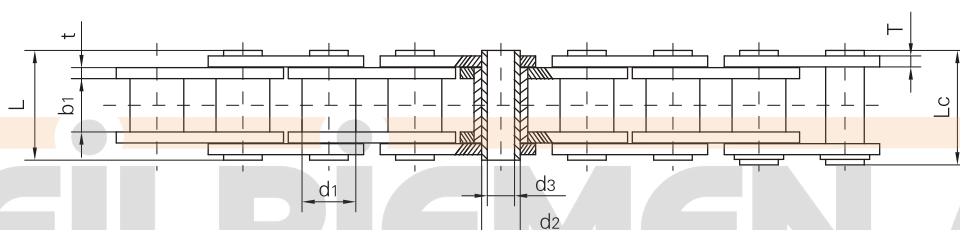


空心销轴链  
Hollow pin chains

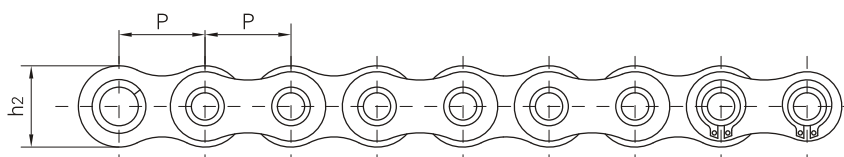

| Vision Chain No. | 节距<br>Pitch | 套筒直径<br>Bush diameter | 内节内宽<br>Width between inner plates | 销轴直径<br>Pin diameter |        | 销轴长度<br>Pin length |        | 内链板高度<br>Inner plate depth | 链板厚度<br>Plate thickness | 极限拉伸载荷<br>Ultimate tensile strength | 平均拉伸载荷<br>Average tensile strength | 每米长重<br>Weight per meter |
|------------------|-------------|-----------------------|------------------------------------|----------------------|--------|--------------------|--------|----------------------------|-------------------------|-------------------------------------|------------------------------------|--------------------------|
|                  | P           | d1 max                | b1 min                             | d2 max               | d3 min | L max              | Lc max | h2 max                     | t/T max                 | Q min                               | Q0                                 | q                        |
|                  | mm          | mm                    | mm                                 | mm                   | mm     | mm                 | mm     | mm                         | mm                      | kN/LB                               | kN                                 | kg/m                     |
| 08BHPF           | 12.700      | 8.51                  | 7.75                               | 6.55                 | 4.50   | 16.4               | 17.6   | 11.80                      | 1.6/1.3                 | 11.1/2523                           | 12.1                               | 0.56                     |
| 08BHPF5          | 12.700      | 8.51                  | 7.75                               | 6.30                 | 4.50   | 16.8               | 18.0   | 12.00                      | 1.60                    | 9.6/2182                            | 10.6                               | 0.62                     |
| 10BHPF3          | 15.875      | 10.16                 | 9.65                               | 7.02                 | 5.13   | 19.5               | 20.5   | 14.70                      | 1.70                    | 10.0/2272                           | 11.5                               | 0.86                     |
| 10BHPF4          | 15.875      | 10.16                 | 9.50                               | 7.20                 | 5.00   | 19.8               | 21.3   | 14.00                      | 2.03/1.6                | 12.5/2840                           | 14.0                               | 0.82                     |
| 12BHPF2          | 19.050      | 12.07                 | 11.68                              | 8.09                 | 6.00   | 22.7               | 23.9   | 16.10                      | 1.85                    | 14.0/3180                           | 16.0                               | 0.82                     |
| 12BHPF3          | 19.050      | 12.07                 | 11.70                              | 8.22                 | 5.75   | 23.6               | 24.9   | 16.20                      | 2.42/1.85               | 16.0/3636                           | 18.0                               | 1.14                     |
| 16BHPF3          | 25.400      | 15.88                 | 17.02                              | 11.50                | 8.20   | 35.3               | 37.0   | 23.20                      | 4.0/3.1                 | 49.0/11136                          | 52.2                               | 2.26                     |
| 16BHPF4          | 25.400      | 11.70                 | 13.50                              | 8.00                 | 4.30   | 28.9               | 30.2   | 21.30                      | 3.00                    | 30.0/6818                           | 33.0                               | 1.81                     |
| 40HP             | 12.700      | 7.95                  | 7.85                               | 5.63                 | 4.00   | 16.5               | 17.6   | 12.00                      | 1.50                    | 11.0/2500                           | 12.2                               | 0.54                     |
| 50HP             | 15.875      | 10.16                 | 9.40                               | 7.03                 | 5.13   | 20.7               | 21.9   | 15.09                      | 2.03                    | 20.0/4545                           | 22.6                               | 0.91                     |
| 50HPF4           | 15.875      | 10.16                 | 8.80                               | 7.03                 | 5.13   | 19.9               | 21.1   | 15.09                      | 2.03                    | 18.0/4180                           | 19.2                               | 0.89                     |
| 60HP             | 19.050      | 11.91                 | 12.70                              | 8.31                 | 6.00   | 25.8               | 26.8   | 18.00                      | 2.42                    | 24.0/5455                           | 26.9                               | 1.29                     |
| 60HPF1           | 19.050      | 11.91                 | 12.70                              | 8.31                 | 5.01   | 25.5               | 26.8   | 18.00                      | 2.42                    | 28.0/6364                           | 30.9                               | 1.37                     |
| 80HP             | 25.400      | 15.88                 | 15.75                              | 11.40                | 8.05   | 32.5               | 33.8   | 24.00                      | 3.25                    | 50.0/11364                          | 52.0                               | 2.26                     |
| 80HPF1           | 25.400      | 11.70                 | 13.50                              | 7.80                 | 4.00   | 27.0               | 28.4   | 21.50                      | 2.42                    | 27.44/6236                          | 29.3                               | 1.50                     |
| 80HPF2           | 25.400      | 15.88                 | 15.75                              | 11.40                | 8.40   | 32.5               | 33.8   | 24.00                      | 3.25                    | 45.0/10227                          | 48.0                               | 2.23                     |
| A2080HP          | 50.800      | 15.88                 | 15.75                              | 11.40                | 8.05   | 32.4               | 33.8   | 24.00                      | 3.25                    | 42.3/9615                           | 46.1                               | 1.60                     |