



# MEGADYNE MEGASYNC™

## RUBBER ENDLESS TIMING BELTS

Megadyne rubber endless timing belts are available with single or double sided teeth, in imperial and RPP-RPC profiles. They are manufactured using the most advanced technology available.

### MEGADYNE MEGASYNC™ IMPERIAL SYNCHRONOUS MXL XL L H XH XXH

- Trapezoidal tooth profile
- Polychloroprene teeth for accurate meshing
- Fiberglass reinforcement for minimal elongation
- Nylon fabric protecting tooth surface

### MEGADYNE MEGASYNC™ STD, HTB

- Curvilinear tooth profile
- Same properties of RPP belts

### MEGADYNE MEGASYNC™ RPP3 RPP5 RPP8 RPP14

- RPP parabolic tooth profile gives graduated pressure increase over tooth height
- Chloroprene rubber for wear resistance and increased service life
- Fiberglass reinforcement for minimal elongation and high flexibility
- Nylon fabric protecting tooth surface, with self lubrication



### MEGADYNE MEGASYNC™ RPC SILVER3 AND GOLD2

Constructed with the highest quality materials.  
That guarantee following advantages:

- Upgrade the existing transmission without changing the pulleys
- Perfect interchangeability with parabolic and deep pulley profile
- Antistatic properties conforming to the ISO 9563 (for Silver3 5M only on request)
- Drive energy efficiency up to 98%
- Excellent for backside idlers
- Higher tooth jump resistance and increased resistance to tooth shear
- Quiet, maintenance-free operation



# MEGADYNE MEGASYNC™

## RUBBER ENDLESS TIMING BELTS




**Titanium** timing belt is the latest rubber based timing belt, high-performing, which significantly improves the “specific power” capacity and offers new application opportunities against alternative systems like gears and chains that always have a disadvantage in terms of weight, noise, lubrication and maintenance costs.

Thanks to the innovative new materials, Titanium offers:

- Increased basic power capacity by up to 30% compared to the previous top of the range
- Use of existing RPP pulleys, maintaining a full functional interchange with other deep pulley profile systems, like HTD
- Allows existing drives to be upgraded without the necessity to replace the pulleys, just the belt itself
- Significant reduction of noise compared to drive systems using polyurethane, steel etc. due to the rubber matrix and teeth with the parabolic profile shape, recognised as the quietest system on the market
- Antistatic qualities in accordance with ISO 9563 standard
- A wide, continuous range of possible operating temperature which makes Titanium the only solution for extreme working conditions.

### MEGASYNC™ STANDARD RANGE:

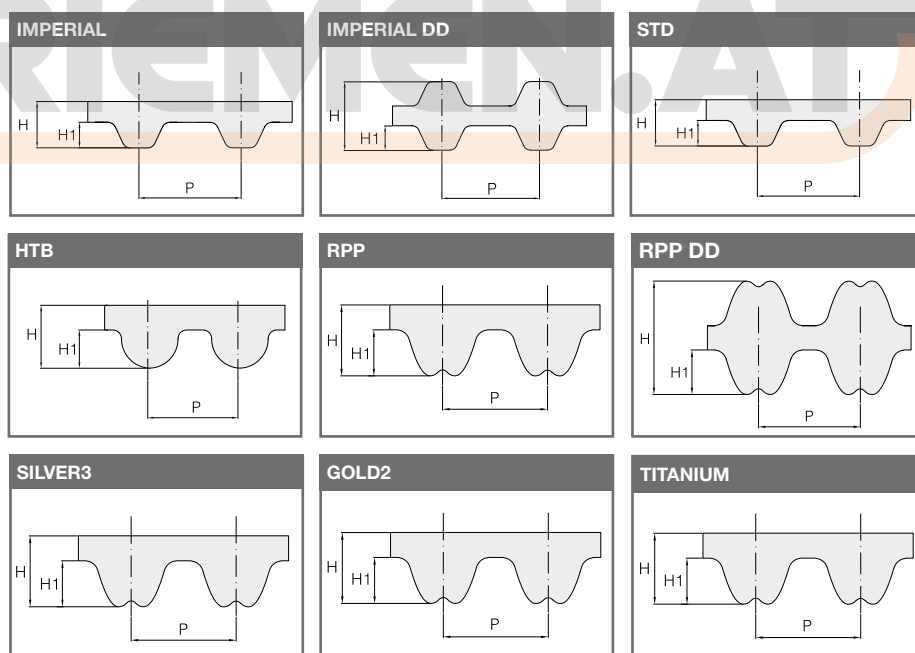

(SLV3 8M DD • SLV3 14M DD • GLD2 8M DD • GLD2 14M DD on demand)



